

UT366A数字差压计




灯光提示



P1/P2独立测量



LCD背光

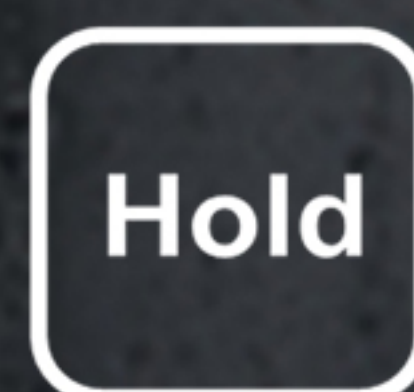

数值保持



官方微信公众号



www.uni-trend.com.cn



欢迎拨打客服热线
400-876-7822

产品特点

- 正负压LED灯光指示
- 多种测量单位可切换
- 可选配皮托管测量风速
- 通道可切换，默认显示P1-P2，
可切换显示P1-P2/P1，P1-P2/P2，P1/P2

技术指标

功能	量程	分辨率	精度	
P1 / P2 / P1-P2 气压测量	0.00 ~ ±15.00 kPa	0.01 kPa	±0.5% FS @25°C	±0.08 kPa
	0.0 ~ ±150.0 mbar	0.1 mbar		±0.8 mbar
	0.000 ~ ±0.150 bar	0.001 bar		±0.001 bar
	0.000 ~ ±2.175 PSI	0.001 PSI		±0.011 PSI
	0.0 ~ ±112.5 mmHg	0.1 mmHg		±0.6 mmHg
	0.00 ~ ±60.29 inH2O	0.01 inH2O		±0.30 inH2O
	0.000 ~ ±4.429 inHg	0.001 inHg		±0.022 inHg
	0.00 ~ ±34.80 Ozin ²	0.01 Ozin ²		±0.18 Ozin ²
	0.000 ~ ±0.152 kgcm ²	0.001 kgcm ²		±0.001 kgcm ²
	0.000 ~ ±5.026 ftH2O	0.001 ftH2O		±0.025 ftH2O
	0.0 ~ ±1531 mmH2O	1 mmH2O		±8 mmH2O
	0.0 ~ ±150.0 hPa	0.1 hPa		±0.8 hPa
风速换算	0.0~19999.9 m/s	0.1 m/s		
	0~199999 fpm	1 fpm		
压力单位	kPa、mbar、bar、PSI、mmHg、inH2O、inHg、Ozin ² 、kgcm ² 、ftH2O、mmH2O、hPa			
风速单位	m/s、fpm			
单位记忆	产品开机时压力单位默认上次关机时的单位			
超量程提示	OL 或 -OL			
环境温度补偿故障提示	Err			
自动关机	仪表在无操作状态5分钟后自动关机(可关闭)			
工作环境	0~50°C、≤85%RH			
储存环境	-10~60°C、≤75%RH			

产品应用



过滤器阻力测试



管道气压测试



空调系统压力测试