

UNI-TREND TECHNOLOGY (CHINA) CO., LTD.

TEST REPORT

SCOPE OF WORK

EMC TESTING-UT256A

REPORT NUMBER

191220147GZU-001

ISSUE DATE

11 April 2020

[REVISED DATE]

[12 October 2023]

PAGES

12

DOCUMENT CONTROL NUMBER

TRF-EN IEC 61326-1:2021-a

© 2023 INTERTEK



TEST REPORT

Applicant Name & Address : UNI-TREND TECHNOLOGY (CHINA) CO., LTD.
No 6, Gong Ye Bei 1 st Road, Songshan Lake National High-Tech
Industrial Development Zone, Dongguan City, Guangdong Province,
China
Manufacturing Site : Same as applicant
Intertek Report No: 191220147GZU-001 Amendment 1

Test standards

EN IEC 61326-1:2021
EN IEC 61326-2-2:2021

Sample Description

Product : 200A AC Fork Meter
Model No. : UT256A
Electrical Rating : CAT II 1000V, CAT III 600V, 2 X 1.5V AA batteries
Serial No. : Not Labeled
Date Received : 23 May 2023
Date Test : 23 May 2023 to 22 September 2023
Conducted

Prepared and Checked By



Jed Guo
Project Engineer

Approved By:



Sky Zhu
Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD,
Guangzhou, Guangdong, China

TEST REPORT

CONTENT

TEST REPORT 1

CONTENT 3

1. TEST RESULTS SUMMARY 4

2. EMC RESULTS CONCLUSION..... 5

3. LABORATORY MEASUREMENTS..... 6

4. EQUIPMENT USED DURING TEST 7

5. EMS TEST..... 8

 5.1 EN 61000-4-3(PURSUANT TO EN IEC 61326-1) RADIATED ELECTROMAGNETIC FIELD IMMUNITY
 9

6. APPENDIX I - PHOTOS OF TEST SETUP 12

TEST REPORT**1. TEST RESULTS SUMMARY**

Test Item	Standard	Result
Radiated EM field immunity	EN IEC 61326-1, EN IEC 61326-2-2 Reference: EN 61000-4-3:2006 +A1:2008+A2:2010	Pass

Remark:

1. The symbol "N/A" in above table means Not Applicable.
2. When determining the test results, measurement uncertainty of tests has been considered.
3. The EUT belonging to Class B, Group 1 equipment, as requirement by EN 55011.

TEST REPORT

2. EMC RESULTS CONCLUSION

Test result:

It is found that the 200A AC Fork Meter, Model: UT256A met the requirements of 2014/30/EU directive and EN IEC 61326-1: 2021 and EN IEC 61326-2-2: 2021 standards.

Report revision reason:

Amendment 1:

This report is the revision of the previous test report 191220147GZU-001 dated 11 April 2020 and shall be used together with it.

This report was issued because of the following change:

- (1) Updated the standard from “EN 61326-1: 2013” to “EN IEC 61326-1:2021”;
- (2) Updated the standard from “EN 61326-2-2:2013” to “EN IEC 61326-2-2:2021”.

Based on engineering judgement, Radiated EM field immunity was performed to UT256A.

The production units are required to conform to the initial sample as received when the units are placed on the market.

TEST REPORT

3. LABORATORY MEASUREMENTS

Configuration Information

Support Equipment:	N/A
Rated Voltage and frequency under test:	2X1.5V
Condition of Environment:	Temperature: 22~28°C Relative Humidity:35~60% Atmosphere Pressure:86~106kPa

Notes:

1. The EMI measurements had been made in the operating mode produced the largest emission in the frequency band being investigated consistent with normal applications. An attempt had been made to maximize the emission by varying the configuration of the EUT.

2. The EMS measurements had been made in the frequency bands being investigated, with the EUT in the most susceptible operating mode consistent with normal applications. The configuration of the test sample had been varied to achieve maximum susceptibility.

3. Test Location:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

All tests were performed at:

Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD, Guangzhou, Guangdong, China

Except Radiated Disturbance and Radiated Susceptibility were performed at:

Room102/104, No 203, KeZhu Road, Science City, GETDD Guangzhou, China

4. Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission (9 kHz-150 kHz)	2.79 dB
2	Conducted Emission (150 kHz-30 MHz)	2.55 dB
3	Disturbance Power (30 MHz-300 MHz)	3.04 dB
4	Radiated Emission (9 kHz-30 MHz)	4.24 dB
5	Radiated Emission (30 MHz-1 GHz)	4.80 dB
6	Radiated Emission (1 GHz-6 GHz)	4.97 dB
7	Radiated Emission (6 GHz-18 GHz)	4.89 dB

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty is calculated in accordance with CISPR16-4-2:2011+A1:2014+A2:2018.

The measurement uncertainty is given with a confidence of 95%, k=2.

Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

TEST REPORT

4. EQUIPMENT USED DURING TEST

Radiated Susceptibility

Equipment No.	Equipment	Model	Manufacturer	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m ³	ETS LINDGREN	1Y
EM031-01	Signal generator	SMB100A	R&S	1Y
EM086-11	Power meter	NRP2	R&S	1Y
EM086-11-01	Power sensor	NRP-Z91	R&S	1Y
EM046-01	Power Amplifier	80RF1000-300	MILMEGA	1Y
EM046-03	Power Amplifier	AS0860-75-45	MILMEGA	1Y
EM061-05	Log. - Per. Broadband Antenna	VULP 9118 E	SCHWARZBECK	2Y
EM061-07	Stacked Log.-Per. Broadband Antenna	STLP 9149	SCHWARZBECK	2Y
EM034-01	Open Switch and Control Platform	OSP120/1505.3009K12	R&S	1Y
EM045-01-01	EMC32 software (RE/RS)	V10.01.00	R&S	1Y
SA047-118	Digital Temperature-Humidity Recorder	RS210	YIJIE	1Y

Detail of the equipment calibration due date:

Equipment No.	Cal. Due date (DD-MM-YYYY)
Radiated Susceptibility	
EM030-04	10/04/2024
EM031-01	19/07/2024
EM086-11	15/11/2023
EM086-11-01	15/11/2023
EM046-01	05/03/2024
EM046-03	04/09/2024
EM061-05	09/10/2023
EM061-07	09/10/2023
EM034-01	/
EM045-01-01	/
SA047-118	16/07/2024

TEST REPORT

5. EMS TEST

Performance Criteria:

- Criterion A: The equipment shall continue to operate as intended during and after the test. No DEGRADATION OF PERFORMANCE or LOSS OF FUNCTION is allowed below a PERFORMANCE LEVEL specified in the user documentation, when the equipment is used as intended. In the case of applying immunity tests with continuous electromagnetic phenomena, the PERFORMANCE LEVEL may be replaced by a permissible LOSS OF PERFORMANCE which shall recover, without user intervention. A permissible LOSS OF PERFORMANCE is allowed within the PERFORMANCE LEVEL only when this information is clearly provided to the end user via documentation, such as the product user manual. No change in the operating state is allowed nor is loss of data.
- Criterion B: The equipment shall continue to operate as intended after the test. No DEGRADATION OF PERFORMANCE or LOSS OF FUNCTION is allowed below a PERFORMANCE LEVEL specified in the user documentation, when the equipment is used as intended. During the test, the equipment PERFORMANCE LEVEL may be replaced by a permissible LOSS OF PERFORMANCE if such LOSS OF PERFORMANCE is detailed in the EMC test plan. A permissible LOSS OF PERFORMANCE is allowed within the PERFORMANCE LEVEL only when this information is clearly provided to the end user via documentation, such as the product user manual. An unintended change of the operating state is allowed if self-recoverable. No loss of stored data is allowed.
- Criterion C: LOSS OF FUNCTION is allowed, provided the function is self-recoverable or can be restored by the operation of the controls. Recovery procedure shall be included in the user documentation. No permanent damage to the equipment is allowed.

Operation mode of EMS test:

Test Item	Operation mode
Radiated EM field immunity	Voltage testing/resistance testing/current testing

Note: "N/A" means Not Applicable in below text.


TEST REPORT

5.1 EN 61000-4-3(Pursuant to EN IEC 61326-1) Radiated Electromagnetic Field Immunity

Performance criterion: A

Test Result: Pass

5.1.1 Block Diagram of Test Setup

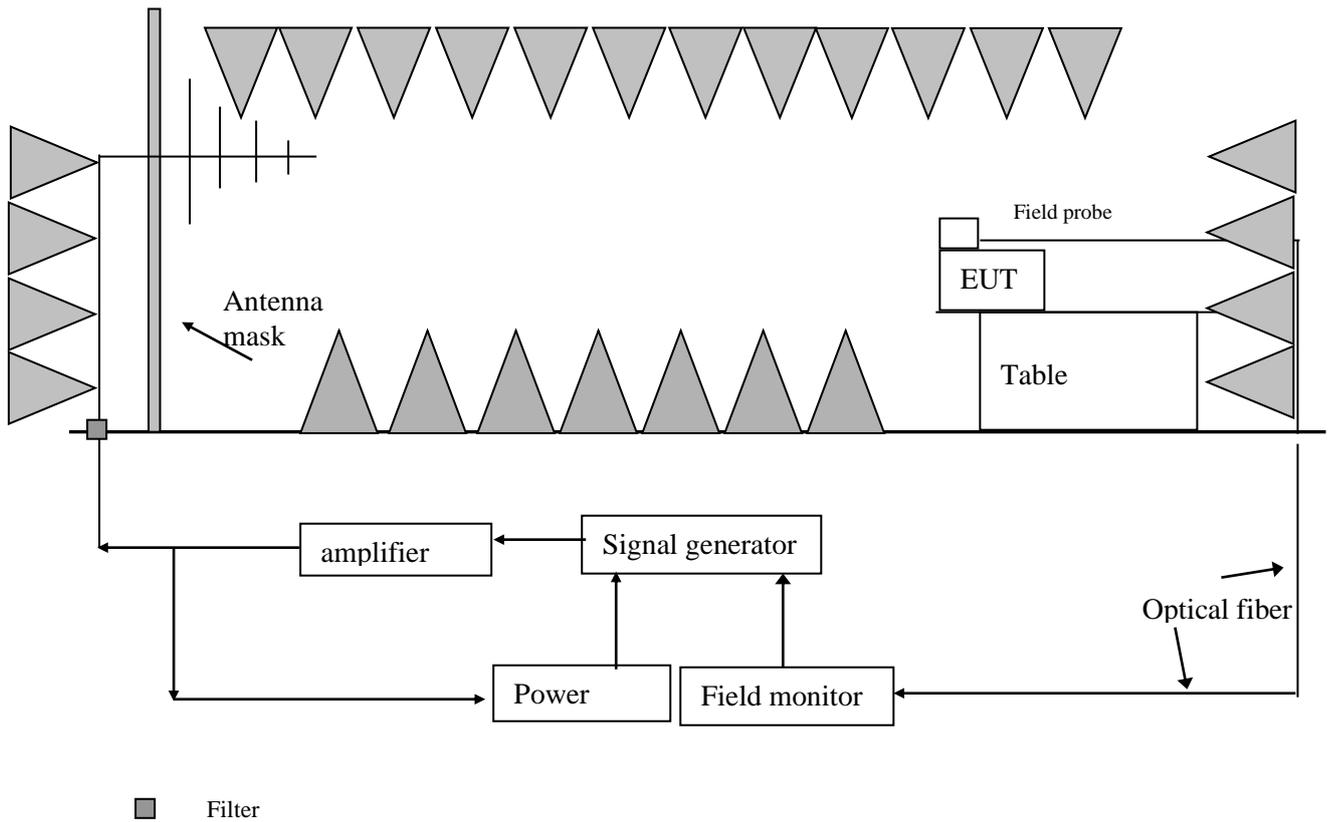

TEST REPORT

5.1.2 Test Setup and Procedure

The test was conducted in a fully anechoic chamber to maintain a uniform field of sufficient dimensions with respect to the EUT, and also in order to comply with various national and international laws prohibiting interference to radio communications.

The equipment was placed in the test facility on a non-conducting table 0.8m high (for floor standing EUT, is placed on a non-conducting support 0.1m height).

For all ports connected to EUT, manufacturer specified cable type and length was used, for those cables no specification, unshielded cable applied. Wire was left exposed to the electromagnetic field for a distance of 1m from the EUT. The EUT was arranged and connected according to its functional requirements

Before testing, the intensity of the established field strength had been checked by placing the field sensor at a calibration grid point, and with the field generating antenna and cables in the same positions as used for the calibration, the forward power needed to give the calibrated field strength was measured. Spot checks was made at a number of calibration grid points over the frequency range 80MHz to 6000MHz, both polarizations was checked.

After calibration, the EUT was initially placed with one face coincident with the calibration plane.

The frequency range was swept from 80 MHz to 1000 MHz at 3V/m EM field, 1.4 GHz to 2 GHz at 3V/m EM field, 2.0 GHz to 6.0 GHz at 1V/m EM field with the signal 80% amplitude modulated with a 1 kHz sine-wave, pausing to adjust the r.f. signal level.

The dwell time at each frequency was 3s so as that the EUT to be exercised and be able to respond.

The step size was 1% of the fundamental with linear interpolation between calibrated points. Test was performed with the generating antenna facing each of the four sides of the EUT.

TEST REPORT


5.1.3 Test Result

Frequency (MHz)	Exposed Side	Field Strength (V/m)	Result
80 to 1000, 1400-2000	Front	3V/m (r.m.s.)	Pass
80 to 1000, 1400-2000	Left	3V/m (r.m.s.)	Pass
80 to 1000, 1400-2000	Rear	3V/m (r.m.s.)	Pass
80 to 1000, 1400-2000	Right	3V/m (r.m.s.)	Pass

Frequency (MHz)	Exposed Side	Field Strength (V/m)	Result
2000-6000	Front	1V/m (r.m.s.)	Pass
2000-6000	Left	1V/m (r.m.s.)	Pass
2000-6000	Rear	1V/m (r.m.s.)	Pass
2000-6000	Right	1V/m (r.m.s.)	Pass

TEST REPORT

6. APPENDIX I - PHOTOS OF TEST SETUP

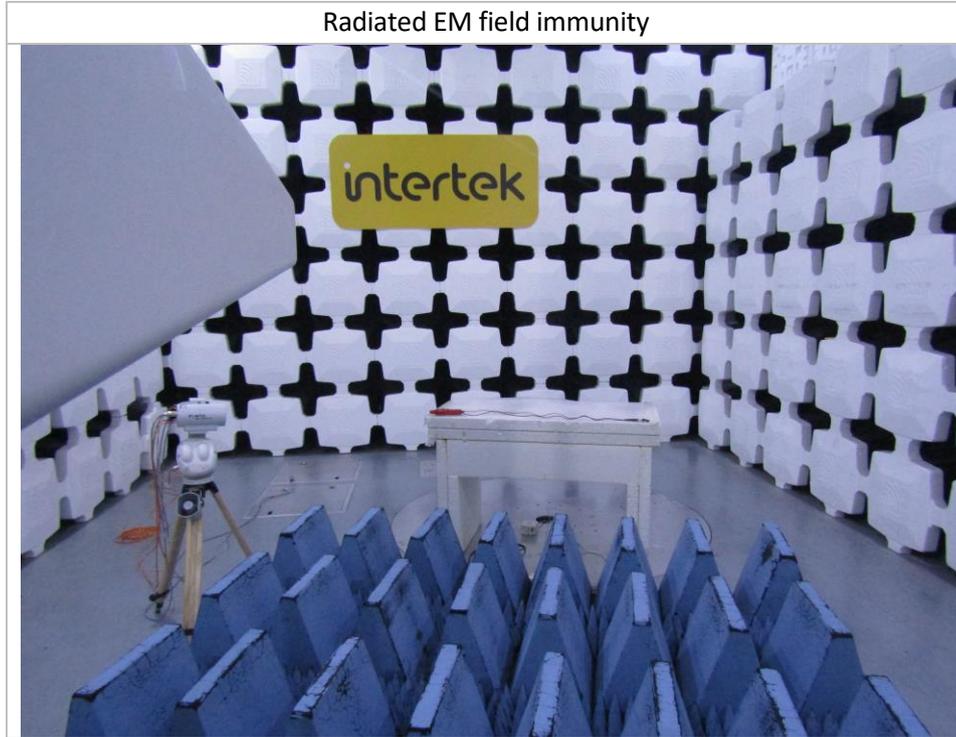

*****End of Report*****