

<p>TEST REPORT EN 61010-1 Safety requirements for electrical equipment for measurement, control, and laboratory use Part 1: General requirements EN IEC 61010-2-033 Safety Requirements for Electrical Equipment for Measurement, Control and Laboratory Use – Part 2-033: Particular Requirements for Hand-Held Multimeters for Domestic and Professional Use, Capable of Measuring Mains Voltage</p>	
Report Number.....	241012004GZU-002
Date of issue.....	13 Jan 2025
Total number of pages.....	63
Name of Testing Laboratory preparing the Report.....	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Applicant's name	Uni-Trend Technology(China) Co., Ltd
Address	No. 6, Gong Ye Bei 1st Road, Songshan Lake National High-Tech Industrial Development Zone, DONGGUAN CITY Guangdong Province 523808, China
Test specification:	
Standard.....	EN 61010-1:2010 +A1:2019, EN IEC 61010-2-033: 2021 +A11:2021
Test procedure	Test report
Non-standard test method	N/A
Test Report Form No.	TTRF_ENIEC61010_2_033_2021
Test Report Form(s) Originator	Copyright © 2021 Intertek
Master TRF.....	2021-12
General disclaimer:	
<p>Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty. This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid</p>	

Test item description :	Industrial Digital Multimeter	
Trade Mark :	UNI-T	
Manufacturer	Same as applicant	
Model/Type reference :	UT197	
Ratings :	Powered: 3 x 1.5Vdc AA battery Measurement Category: CAT IV 1000V	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/> Testing Laboratory:	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch	
Testing location/ address	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China	
Tested by (name, function, signature) :	Eric Deng /Engineer	
Approved by (name, function, signature) .. :	Justin He /Manager	
<input type="checkbox"/> Testing procedure: CTF Stage 1:	NA	
Testing location/ address		
Tested by (name, function, signature) :		
Approved by (name, function, signature) .. :		
<input type="checkbox"/> Testing procedure: CTF Stage 2:	NA	
Testing location/ address		
Tested by (name + signature) :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		

List of Attachments (including a total number of pages in each attachment)		
Document No.	Documents included / attached to this report (description)	Page No.
Appendix 1	Product photos	4

Documents referenced by this report (available on request):		
Document Name or No.	Documents description	Page No.
None		

Summary of testing:

This equipment under test complied with EN 61010-1:2010 +A1:2019, EN IEC 61010-2-033: 2021 +A11:2021

Clause	Comment
All applicable clauses performed	Pass

Tests performed (name of test and test clause): All applicable clauses performed	Testing location: Intertek Testing Services Shenzhen Ltd. Guangzhou Branch Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China
Summary of compliance <input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 61010-1:2010 +A1:2019, EN IEC 61010-2-033: 2021 +A11:2021</u>	
Statement concerning the uncertainty of the measurement systems used for the tests (may be required by the product standard or client) <input type="checkbox"/> Internal procedure used for type testing through which traceability of the measuring uncertainty has been established: Procedure number, issue date and title: Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing. <input checked="" type="checkbox"/> Statement not required by the standard used for type testing	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



Test item particulars:	
Type of item	Measurement
Description of equipment function.....	Refer to general remark
Connection to MAINS supply	Battery operated
Overvoltage category	Battery operated
Measurement category.....	CAT IV 1000V
POLLUTION DEGREE.....	2
Means of protection	Class II (isolated)
Environmental conditions	-40 °C to +55 °C
For use in wet locations	No
Equipment mobility.....	Hand-held
Operating conditions.....	intermittent 10A Max. 30s each 15min
Overall size of equipment (W x D x H).....	206mm x 93.5mm x 51.6mm
Mass of equipment (kg).....	0.835 (including batteries)
Marked degree of protection to IEC 60529	IP67
Accessories and detachable parts included in the evaluation.....	N/A
Options	N/A
Possible test case verdicts:	
- Test case does not apply to the test object	N/A (Not Applicable)
- Test object does meet the requirement	P (Pass)
- Test object does not meet the requirement	F (Fail)
Testing:	
Date of receipt of test item.....	12 Oct 2024
Date (s) of performance of tests	12 Oct 2024 – 13 Jan 2025
General remarks:	
<p>The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory. "(see ENCLOSURE #)" refers to additional information appended to the report. "(see Form A.xx)" refers to a Table appended to the report. Bottom lines for measurement Tables Forms A.xx are optional if used as record.</p>	
<p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>	
<p>Name and address of factory (ies) : Uni-Trend Technology (China) Co., Ltd No 6, Gong Ye Bei 1st Road, Songshan Lake National High-Tech Industrial Development Zone, Dongguan City, Guangdong Province, 523808, China</p>	

General product information and other remarks:

UT197 is a general high-precision true RMS handheld digital multimeter.

Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid.

Description of model differences:

None

Description of special features:

None

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033

Clause	Requirement + Test	Result - Remark	Verdict
4	TESTS		P
4.4	Testing in SINGLE FAULT CONDITIONS		P
4.4.1	Fault tests		P
4.4.2	Application of SINGLE FAULT CONDITIONS		P
4.4.2.1	SINGLE FAULT CONDITIONS not covered by 4.4.2.2 to 4.4.2.14		P
4.4.2.2	PROTECTIVE IMPEDANCE	No PROTECTIVE IMPEDANCE	N/A
4.4.2.3	PROTECTIVE CONDUCTOR	No PROTECTIVE CONDUCTOR	N/A
4.4.2.4	Equipment or parts for short-term or intermittent operation	Max. 30s each 15min	P
4.4.2.5	Motors	No motors	—
	– stopped while fully energized		N/A
	– prevented from starting		N/A
	– one phase interrupted (multi-phase)		N/A
4.4.2.6	Capacitors	No such capacitors	N/A
4.4.2.7	MAINS transformers	No Mains transformers	N/A
4.4.2.7.2	Short circuit		N/A
4.4.2.7.3	Overload		N/A
4.4.2.8	Outputs	No such part	N/A
4.4.2.9	Equipment for more than one supply	Only one supply	N/A
4.4.2.10	Cooling	No cooling parts	—
	– air holes closed		N/A
	– fans stopped		N/A
	– coolant stopped		N/A
	– loss of cooling liquid		N/A
4.4.2.11	Heating devices	No heating devices	—
	– timer overridden		N/A
	– temperature controller overridden		N/A
4.4.2.12	Insulation between circuits and parts	No such parts	N/A
4.4.2.13	Interlocks	No interlocks	N/A
4.4.2.14	Voltage selectors	No such devices	N/A
4.4.3	Duration of tests		—
4.4.4	Conformity after application of fault conditions		P
5	MARKING AND DOCUMENTATION		P
5.1	Marking		P
5.1.1	General		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Required equipment markings		—
	– Visible from the exterior; or		P
	– Visible after removing cover or opening door	No such markings	N/A
	– Visible after removal from a rack or panel	No such markings	N/A
	Not put on parts which can be removed by an operator		P
	Letter symbols (IEC 60027) used		P
	Graphic symbols of Table 1 used		P
5.1.2	Identification		P
	Equipment is identified by:		—
	a) Manufacturer's or supplier's name or trademark	UNI-T	P
	b) Model number, name or other means	UT197	P
	Manufacturing location identified	Only one manufacturing location	N/A
5.1.3	MAINS supply	Battery operated	N/A
	Equipment is marked as follows:		—
	a) Nature of supply:		—
	1) a.c. RATED MAINS frequency or range of frequencies		—
	2) d.c. with symbol 1		—
	b) RATED supply voltage(s) or range		—
	c) Max. RATED power (W or VA) or input current.....:		—
	The marked value not less than 90 % of the maximum value		N/A
	If more than one voltage range:		—
	Separate values marked; or		N/A
	Values differ by less than 20 %		N/A
	d) OPERATOR-set for different RATED supply voltages:		—
	Indicates the equipment set voltage		N/A
	PORTABLE EQUIPMENT indication is visible from the exterior		N/A
	Changing the setting changes the indication		N/A
	e) Accessory MAINS socket-outlets accepting standard MAINS plugs are marked:		—
	With the voltage if it is different from the MAINS supply voltage		—
	For use only with specific equipment		N/A
	If not marked for specific equipment it is marked with:		—

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	The maximum RATED current or power; or		N/A
	Symbol 14 with full details in the documentation		N/A
5.1.4	Fuses		P
	OPERATOR replaceable fuse marking (see also 5.4.5)	Fuse marking on panel near terminal FF600mA 1000V FF11A 1000V	—
5.1.5	TERMINALS, connections and operating devices		P
5.1.5.1	General		P
	<i>If necessary for safety, indication of the purpose of TERMINALS, connectors, controls, and indicators are marked</i>		P
	<i>Where insufficient space, symbol 14 is used.</i>		P
	Push-buttons and actuators of emergency stop devices and indicators:	No such parts	—
	– used only to indicate a warning of danger; or		N/A
	– the need for urgent action		N/A
	– coloured red		N/A
	– coded as specified in IEC 60073		N/A
	Supplementary means of coding provided, if meaning of colour relates (see IEC 60073):	No such supplementary means	—
	– to safety of persons; or		N/A
	– safety of the environment		N/A
5.1.5.2	TERMINALS		—
	MAINS supply TERMINAL identified	Battery operated	N/A
	Other TERMINAL marking:		—
	a) FUNCTIONAL EARTH TERMINALS marked with symbol 5	No functional earth terminals	N/A
	b) PROTECTIVE CONDUCTOR TERMINALS:	No protective conductor terminals	—
	Symbol 6 is placed close to or on the TERMINAL; or		N/A
	Part of appliance inlet		N/A
	c) TERMINALS of circuits (symbol 7 used)	No such terminals	N/A
	d) <i>HAZARDOUS LIVE TERMINALS supplied from the interior of the hand-held multimeter are marked with the voltage, current, charge or energy value or range, or;</i>	No such hazardous live terminals	N/A
	<i>- marked with symbol 12 of Table 1</i>		N/A
	aa) <i>TERMINALS supplied from other TERMINALS which could be HAZARDOUS LIVE, with symbol 12 or 14 of Table 1</i>	No such terminals	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.5.101	Measuring circuit TERMINALS		P
	Marked with rated voltage to earth	1000V	P
	Each pair or set of measuring circuit TERMINALS are marked with RATED voltage or current or both		—
	TERMINALS RATED for MAINS are marked "CAT III and/or "CAT IV"	CAT IV 1000V	P
	c) Alternate markings are used for measuring circuit TERMINALS that do not exceed the levels of 6.3.1		N/A
	d) Markings are not used for dedicated measuring circuit TERMINALS, but a means for identification is provided	No such measuring circuit TERMINALS	N/A
	TERMINALS markings are visible with connectors and TERMINALS mated		P
5.1.6	Switches and circuit-breakers	No switches and circuit-breakers	N/A
	If disconnecting device, off position clearly marked		N/A
	If push-button used as power supply switch:		—
	– Symbol 9 and 15 used for on-position		N/A
	– Symbol 10 and 16 used for off-position		N/A
	– Pair of symbols 9, 15 and 10, 16 close together		N/A
5.1.7	Equipment protected by DOUBLE INSULATION or REINFORCED INSULATION		P
	Protected throughout (symbol 11 used)	Symbol 11 marked on rear panel	P
	Only partially protected (symbol 11 not used)		N/A
5.1.8	Field-wiring TERMINAL boxes	No Field-wiring TERMINAL boxes	N/A
	If TERMINAL or ENCLOSURE exceeds 60 °C:		—
	Cable temperature RATING marked.....:		—
	Marking visible before and during connection or beside TERMINAL		N/A
5.2	Warning markings		P
	Warning markings are visible in NORMAL USE	On battery cover	P
	Warning marking is placed on or near the particular part		P
	Symbols and text correct dimensions and colour .:		—
	a) Symbols min. 2,75 mm and text 1,5 mm high and contrasting in colour with background		P
	b) Symbols or text moulded, stamped or engraved in material min. 2,0 mm high		P
	0.5 mm depth or raised if not contrasting in colour		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	<i>If necessary, marked with symbol 14</i>		P
	<i>Statement to isolate or disconnect if access by using a tool to HAZARDOUS LIVE parts is permitted</i>		P
5.3	Durability of markings		P
	The required markings remain clear and legible in NORMAL USE		P
5.4	Documentation		P
5.4.1	General		P
	<i>Hand-held multimeter is accompanied by documentation for safety purposes in an accepted language for OPERATOR or RESPONSIBLE BODY</i>		P
	<i>Safety documentation in a selected language for service personnel authorized by the manufacturer</i>	English used	P
	Documentation includes:		—
	a) Intended use		P
	b) Technical specification		P
	c) Name and address of manufacturer or supplier		P
	d) Information specified in 5.4.2 to 5.4.6		P
	e) Information to mitigate residual RISK (see also subclause 17)		N/A
	f) Accessories for safe operation of the equipment specified	No such accessories	N/A
	g) Guidance provided to check correct function of the equipment, if incorrect reading may cause a HAZARD from harmful or corrosive substances of HAZARDOUS live parts	No such hazardous	N/A
	h) Instructions for lifting and carrying	Hand-held equipment No such required	N/A
	Warning statements and a clear explanation of warning symbols:		—
	– provided in the documentation; or		P
	– information is marked on the equipment		P
	<i>aa) indication that probe assemblies are appropriately RATED for MEASUREMENT CATEGORY III or IV and have a suitable voltage RATING for the circuit to be measured</i>		P
	<i>bb) information about each relevant MEASUREMENT CATEGORY (see 5.1.5.101). If the hand-held multimeter has multiple MEASUREMENT CATEGORY RATINGS, the documentation clearly identifies MEASUREMENT CATEGORIES where the hand-held multimeter may be used or must not be used</i>		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Documentation may be provided on printed or electronic media, however printed information is required for all information necessary for safety that might not be available in electronic form at the time it is needed. The documentation shall be delivered with the equipment. Consideration shall be given to the ability of the RESPONSIBLE BODY to read the media.	Printed media	P
5.4.2	Equipment RATINGS		P
	Documentation includes:		—
	a) Supply voltage or voltage range	3x1.5V AA battery	—
	Frequency or frequency range.....		—
	Power or current rating		—
	b) Description of all input and output connections in accordance to 6.6.1 a)	No such connections except measuring terminal	N/A
	c) RATING of insulation of external circuits in accordance to 6.6.1 b)	No such connections	N/A
	d) Statement of the range of environmental conditions (refer to 1.4):		—
	1) indoor or outdoor use,	Indoor used	P
	2) altitude,	Up to 2000m	P
	3) temperature,	-40°C to 55°C	P
	4) relative humidity,	0 %(up to °C); 0 % to 80 % (0 °C to 35 °C) ; 0 % to 50 % (35 °C to 55 °C)	P
	5) MAINS supply voltage fluctuations,	Battery operated	N/A
	6) OVERVOLTAGE CATEGORY,	Battery operated	N/A
	7) WET LOCATION, if applicable,	Not for wet location	N/A
	8) POLLUTION DEGREE of the intended environment	2	P
	e) Degree of ingress protection (IEC 60529)	IP 67	P
	f) If impact rating less than 5 J:	Hand-held equipment No impact test required	—
	IK code in accordance to IEC 62262 marked; or		N/A
	symbol 14 of Table 1 marked, with		N/A
	RATED energy level and test method stated		N/A
5.4.3	Equipment installation	Hand-held equipment No installation required	N/A
	Documentation includes instructions for:		—
	a) Assembly, location and mounting requirements		N/A
	b) Instructions for protective earthing		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033

Clause	Requirement + Test	Result - Remark	Verdict
	c) Connections to supply		N/A
	d) PERMANENTLY CONNECTED EQUIPMENT:		—
	1) Supply wiring requirements		N/A
	2) If external switch or circuit-breaker, requirements and location recommendation		N/A
	e) Ventilation requirements		N/A
	f) Safety characteristics for special external services (e. g. maximum and minimum temperature, pressure, flow of air, cooling liquid)		N/A
	g) Instructions relating to sound level		N/A
5.4.4	Equipment operation		P
	Instructions for use include:		—
	a) Identification and description of operating controls		P
	b) Positioning for disconnection	Battery operated	N/A
	c) Instructions for interconnection to accessories or other equipment		P
	d) Specification of intermittent operation limits	10A max 30 seconds each 15 minutes	P
	e) Explanation of symbols used		P
	f) Replacement of consumable materials	AA battery	P
	g) Cleaning and decontamination	No such required	N/A
	h) Listing of any poisonous or injurious gases and quantities	No poisonous or injurious gases and quantities	N/A
	i) RISK reduction procedures relating to flammable liquids (see 9.5 c)	No flammable liquids	N/A
	j) RISK reduction procedures relating burn from surfaces permitted to exceed limits of 10.1	No parts exceed limits of 10.1	N/A
	Additional precautions for IEC 60950 conforming equipment in regard to moistures and liquids		N/A
	A statement about protection impairment if used in a manner not specified by the manufacturer		P
5.4.5	Equipment maintenance and service		P
	Instructions for RESPONSIBLE BODY include:		—
	Instructions sufficient in detail permitting safe maintenance and inspection and continued safety:		—
	Instruction against the use of detachable MAINS supply cord with inadequate RATING	Battery operated	P
	Specific battery type of user replaceable batteries	Battery: AA	P
	Any manufacturer specified parts	No specified parts	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	RATING and characteristics of fuses	FF600mA,1000V FF11A, 1000V	P
	Instructions include following subjects permitting safe servicing and continued safety:		—
	a) Product specific RISKS may affect service personnel		N/A
	b) Protective measures for these RISKS		N/A
	c) Verification of the safe state after repair		N/A
5.4.6	Integration into systems or effects resulting from special conditions	No such risk	N/A
	Aspects described in documentation		N/A
6	PROTECTION AGAINST ELECTRIC SHOCK		P
6.1	General		P
6.1.1	Requirements		P
	Protection against electric shock maintained in NORMAL CONDITION and SINGLE FAULT CONDITION		P
	ACCESSIBLE parts not HAZARDOUS LIVE		P
	Voltage, current, charge or energy below the limits in NORMAL CONDITION and in SINGLE FAULT CONDITION between:		—
	ACCESSIBLE parts and earth		P
	two ACCESSIBLE parts on same piece of the equipment within a distance of 1,8 m		P
	Conformity is checked by the determination of 6.2 and 6.3 followed by the tests of 6.4 to 6.11		P
6.1.2	Exceptions		N/A
	Following HAZARDOUS LIVE parts may be ACCESSIBLE to an OPERATOR:	No such parts	—
	a) parts of lamps and lamp sockets after lamp removal		N/A
	b) parts to be replaced by OPERATOR only by the use of tool and warning marking		N/A
	Those parts not HAZARDOUS LIVE 10 s after interruption of supply		N/A
	Capacitance test if charge is received from internal capacitor		N/A
6.2	Determination of ACCESSIBLE parts		P
6.2.1	General		P
	Unless obviously determination of ACCESSIBLE parts as specified in 6.2.2 to 6.2.4		P
6.2.2	Examination		P
	– with jointed test finger (as specified B.2)		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	– with rigid test finger (as specified B.1) and a force of 10 N		P
6.2.3	Openings above parts that are HAZARDOUS LIVE	No openings	N/A
	– test pin with length of 100 mm and 4 mm in diameter applied		N/A
6.2.4	Openings for pre-set controls	No such parts	N/A
	– test pin with length of 100 mm and 3 mm in diameter applied		N/A
6.3	Limit values for ACCESSIBLE parts		P
6.3.1	Levels in NORMAL CONDITION		P
	a) Voltage limits less than 30 V r.m.s. and 42,4 V peak or 60 V d.c.		N/A
	for WET LOCATIONS voltage limits less than 16 V r.m.s. and 22,6 V peak or 35 V d.c.	Not used for WET LOCATIONS	N/A
	Voltages are not HAZARDOUS LIVE the levels of:		—
	b) Current less than 0,5 mA r.m.s. for sinusoidal, 0,7 mA peak non-sinusoidal or mixed frequencies or 2 mA d.c. when measured with measuring circuit A.1 or A.2 if less than 100 Hz	Network: A1 Max leakage current: 0.02mA _{peak} , 0.01mA _{rms}	P
	for WET LOCATIONS measuring circuit A.4 used	Not used for wet locations	N/A
	70 mA r.m.s. when measured with circuit A.3 for higher frequencies	Network: A3 Max leakage current: 0.01mA _{rms}	P
	c) Levels of capacitive charge or energy less:	No such capacitance	—
	1) 45 µC for voltages up to 15 kV peak or d.c. or line A of Figure 3		N/A
	2) 350 mJ stored energy for voltages above 15 kV peak or d.c.		N/A
6.3.2	Levels in SINGLE FAULT CONDITION		P
	a) Voltage limits less than 50 V r.m.s. and 70 V peak or 120 V d.c.		N/A
	for WET LOCATIONS voltage limits less than 33 V r.m.s. and 46,7 V peak or 70 V d.c.	Not used for wet locations	P
	Voltages are not HAZARDOUS LIVE the levels of:		—
	b) Current less than 3,5 mA r.m.s. for sinusoidal, 5 mA peak non-sinusoidal or mixed frequencies or 15 mA d.c. when measured with measuring circuit A.1 or A.2 if less than 100 Hz	Network: A1 Max leakage current: 0.02mA _{peak} , 0.01mA _{rms}	P
	for WET LOCATIONS measuring circuit A.4 used	Not used for wet locations	N/A
	500 mA r.m.s. when measured with circuit A.3 for higher frequencies	Network: A3 Max leakage current: 0.01mA _{rms}	P
	c) Levels of capacitive charge or energy less line B of Figure 3	No such capacitance	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
6.4	Primary means of protection		P
6.4.1	General		P
	ACCESSIBLE parts prevented from being HAZARDOUS LIVE by one or more of following means:		—
	a) ENCLOSURES or PROTECTIVE BARRIERS (see 6.4.2)		P
	b) BASIC INSULATION (see 6.4.3)		P
	c) Impedance (see 6.4.4)	No such protection	N/A
6.4.2	ENCLOSURES or PROTECTIVE BARRIERS		P
	– meet rigidity requirements of 8.1		P
	– meet requirements for BASIC INSULATION, if protection is provided by insulation		P
	– meet requirements of 6.7 for CREEPAGE and CLEARANCES between ACCESSIBLE parts and HAZARDOUS live parts, if protection is provided by limited access		P
6.4.3	BASIC INSULATION		P
	– meet CLEARANCE, CREEPAGE DISTANCE and solid insulation requirements of 6.7		P
6.4.4	Impedance	No such protection	N/A
	Impedance used as primary means of protection meets all the following requirements:		—
	a) limits current or voltage to level of 6.3.2		N/A
	b) RATED for maximum WORKING VOLTAGE and the amount of power it will dissipate		N/A
	c) CLEARANCE, CREEPAGE DISTANCE between terminations of the impedance meet requirements of BASIC INSULATION of 6.7		N/A
6.5	Additional means of protection in case of SINGLE FAULT CONDITION		P
6.5.1	General		P
	ACCESSIBLE parts are prevented from becoming HAZARDOUS LIVE by the primary means of protection and supplemented by one of:		—
	a) SUPPLEMENTARY INSULATION (see 6.5.3)		P
	b) Current or voltage limiting device (see 6.5.6)	No such devices	N/A
	c) REINFORCED INSULATION (see 6.5.3)		P
	d) PROTECTIVE IMPEDANCE (see 6.5.4)	No such protection	N/A
6.5.2	NOT USED		—
6.5.3	Voltage limiting devices or voltage-sensitive tripping devices as defined in a) and b), shall have at least the voltage and current RATINGS of the measuring TERMINALS.	No such devices	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Meet CLEARANCE, CREEPAGE DISTANCE and solid insulation requirements of 6.7		N/A
6.5.4	PROTECTIVE IMPEDANCE	No such protection	N/A
	Limits current or voltage to level of 6.3.1 in NORMAL and to level of 6.3.2 in SINGLE FAULT CONDITION		N/A
	CLEARANCE, CREEPAGE DISTANCE between terminations of the impedance meet requirements of DOUBLE or REINFORCED INSULATION of 6.7		N/A
	The PROTECTIVE IMPEDANCE consists of one or more of the following:		—
	a) appropriate single component suitable for safety and reliability for protection, it is:		—
	1) RATED twice the maximum WORKING VOLTAGE		N/A
	2) resistor RATED for twice the power dissipation for maximum WORKING VOLTAGE		N/A
	b) combination of components		N/A
	Single electronic device not used as PROTECTIVE IMPEDANCE		N/A
6.5.5	Not used		—
6.5.6	Current- or voltage-limiting devices	No such devices	N/A
	Device complies with all of:		—
	a) RATED to limit the current or voltage to the level of 6.3.2		N/A
	b) RATED for the maximum WORKING VOLTAGE; and		N/A
	RATED for the maximum operational current if applicable		N/A
	c) CLEARANCE, CREEPAGE DISTANCE between terminations of the impedance meet requirements of SUPPLEMENTARY INSULATION of 6.7		N/A
6.6	Connections to external circuits	Only connected to external circuit by a certified probe	P
6.6.1	General		P
	Connections do not cause ACCESSIBLE parts of the following to become HAZARDOUS LIVE in NORMAL CONDITION or SINGLE FAULT CONDITION:		—
	– the external circuits		P
	– the equipment		P
	Protection achieved by separation of circuits; or		P
	short circuit of separation does not cause a HAZARD		N/A
	Instructions or markings for each terminal include:		—
	a) RATED conditions for TERMINAL		P
	b) Required RATING of external circuit insulation		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
6.6.2	TERMINALS for external circuits	No such terminals	N/A
	TERMINALS which receive a charge from an internal capacitor are not HAZARDOUS LIVE after 10 s of interrupting supply connection		N/A
6.6.3	Circuits with terminals which are HAZARDOUS LIVE	No hazardous live terminals	N/A
	These circuits are:		—
	Not connected to ACCESSIBLE conductive parts; or		N/A
	Connected to ACCESSIBLE conductive parts, but are not MAINS CIRCUITS and have one TERMINAL contact at earth potential		N/A
	No ACCESSIBLE conductive parts are HAZARDOUS LIVE		N/A
6.6.4	Terminals for stranded conductors	No such terminals	N/A
	No RISK of accidental contact because:		—
	– Located or shielded		N/A
	– Self-evident or marked whether or not connected to ACCESSIBLE conductive parts		N/A
	Complies as applicable:		—
	a) Manufacturer's specified maximum length of removed insulation, or		N/A
	b) 8 mm length of insulation removed		N/A
6.6.101	<i>Measuring circuit TERMINALS</i>		P
	<i>Conductive parts of unmated measuring circuit TERMINAL are separated by at least</i>	2.6mm	—
	<i>a) For TERMINALS with voltage RATING up to 1000Va.c. or 1500Vd.c. the applicable CLEARANCE AND CREEPAGE DISTANCE of Table 101</i>	Measured 5.7mm	P
	<i>b) For TERMINALS with voltage RATING exceeding 1000Va.c. or 1500Vd.c., 2.8mm for the CLEARANCE and CREEPAGE DISTANCE.</i>	Up to 1000V	N/A
	<i>These TERMINALS also withstand the voltage test of 6.8 with voltage equal to the RATED voltage of TERMINAL multiple by 1.25</i>		P
6.6.102	<i>Specialized measuring circuit TERMINALS</i>	No such terminals	N/A
	<i>Components, sensors, and devices for connecting to specialized measuring circuit TERMINALS are not both ACCESSIBLE and HAZARDOUS LIVE, in either NORMAL CONDITION or SINGLE-FAULT CONDITION</i>		N/A
	<i>Accessible parts did not exceed the levels of 6.3.1 and 6.3.2</i>		N/A
6.7	Insulation requirements		P
6.7.1	The nature of insulation		P
6.7.1.1	General		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulation between ACCESSIBLE parts or between separate circuits consist of CLEARANCES, CREEPAGE DISTANCES and solid insulation if provided as protection against a HAZARD		P
6.7.1.2	CLEARANCES		P
	Required CLEARANCES reflecting factors of 6.7.1.1		P
	Equipment rated for operating altitude greater than 2000 m correction factor of Table 3 of 61010-1 applied	Up to 2000m	N/A
6.7.1.3	CREEPAGE DISTANCES		P
	Required CREEPAGE DISTANCES reflecting factors of 6.7.1.1 a) to d)		P
	CTI material group reflected by requirements		P
	CTI test performed		N/A
	<i>CREEPAGE DISTANCES according to material group I used</i>		P
	<i>CREEPAGE DISTANCES according to material group I used for the insulating materials of the TERMINALS connected only to a hand-held probe assembly complying with Part 031</i>		P
6.7.1.4	Solid insulation		P
	Required solid insulation reflecting factors of 6.7.1.1 a) to d)		P
6.7.1.5	<i>Requirements for insulation according to type of circuit</i>	All of internal circuits are considered to be rated for CAT IV 1000V	P
6.7.2	Insulation for MAINS CIRCUITS of OVERVOLTAGE CATEGORY II with a nominal supply voltage up to 300 V	All of internal circuits are considered to be rated for CAT IV 1000V	N/A
6.7.2.1	CLEARANCES and CREEPAGE DISTANCES		—
	Values for MAINS CIRCUITS of Table 4 are met		N/A
	Coatings to achieve reduction to POLLUTION DEGREE 1 comply with requirements of Annex H		N/A
6.7.2.2	Solid insulation		N/A
6.7.2.2.1	General		N/A
	Withstands electrical and mechanical stresses in normal use and all RATED environmental conditions of 1.4		N/A
	Equipment passed voltage tests of 6.8.3 with values of Table 5		N/A
	Complies as applicable:		—
	a) ENCLOSURE or PROTECTIVE BARRIER of Clause 8		N/A
	b) moulded and potted parts requirements of 6.7.2.2.2		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	c) inner layers of printed wiring boards requirements of 6.7.2.2.3		N/A
	d) thin-film insulation requirements of 6.7.2.2.4		N/A
6.7.2.2.2	Moulded and potted parts		—
	Conductors between same two layers are separated by at least 0,4 mm after moulding is completed		N/A
6.7.2.2.3	Inner insulating layers of printed wiring boards		—
	Separated by at least 0,4 mm between same two layers		N/A
	REINFORCED INSULATION has adequate electric strength; one of following methods used:		—
	a) thickness of insulation is at least 0,4 mm		N/A
	b) insulation is assembled of minimum two separate layers, each RATED for test voltage of Table 5 for BASIC INSULATION		N/A
	c) insulation is assembled of minimum two separate layers, where the combination is rated for test voltage of Table 5 for REINFORCED INSULATION		N/A
6.7.2.2.4	Thin-film insulation		—
	Conductors between same two layers are separated by applicable CLEARANCES and CREEPAGE DISTANCE of 6.7.2.1		N/A
	REINFORCED INSULATION have adequate electric strength; one of the following methods used:		—
	a) thickness through the insulation at least 0,4 mm		N/A
	b) insulation is assembled of min. two separate layers, each RATED for test voltage of Table 5 for BASIC INSULATION		N/A
	c) insulation is assembled of min. three separate layers, where the combination of two layers passed voltage tests of 6.8.3 with values of Table 5 for REINFORCED INSULATION		N/A
6.7.3	Insulation for secondary circuits derived from MAINS CIRCUITS of OVERVOLTAGE CATEGORY II up to 300 V	All internal circuits are considered to be rated for CAT IV 1000V	N/A
6.7.3.1	General		N/A
	Secondary circuits where separation from MAINS CIRCUITS is achieved by a transformer providing:		—
	– REINFORCED INSULATION		N/A
	– DOUBLE INSULATION		N/A
	– screen connected to the PROTECTIVE CONDUCTOR TERMINAL		N/A
6.7.3.2	CLEARANCES		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	a) meet the values of Table 6 for BASIC INSULATION and SUPPLEMENTARY INSULATION; or		N/A
	twice the values of Table 6 for REINFORCED INSULATION; or		N/A
	b) pass the voltage tests of 6.8 with values of Table 6;		N/A
	with following adjustments:		—
	1) values for reinforced insulation are 1,6 times the values for basic insulation		N/A
	2) if operating altitude is greater than 2000 m values of CLEARANCES multiplied with factor of Table 3		N/A
	3) minimum CLEARANCE is 0,2 mm for POLLUTION DEGREE 2 and 0,8 mm for POLLUTION DEGREE 3		N/A
6.7.3.3	CREEPAGE DISTANCES		N/A
	Based on WORKING VOLTAGE meets the values of Table 7 for BASIC and SUPPLEMENTARY INSULATION		N/A
	Values for REINFORCED INSULATION are twice the values of BASIC INSULATION		N/A
	Coatings to achieve reduction to POLLUTION DEGREE 1 comply with requirements of Annex H		N/A
6.7.3.4	Solid insulation		N/A
6.7.3.4.1	General		N/A
	Withstands electrical and mechanical stresses in normal use and all RATED environmental conditions of 1.4		—
	a) Equipment passed voltage test of 6.8.3.1 for 5 s with VALUES of Table 6 for BASIC and SUPPLEMENTARY INSULATION		N/A
	values for REINFORCED INSULATION are 1,6 times the values of BASIC INSULATION		N/A
	b) if WORKING VOLTAGE exceeds 300 V, equipment passed voltage test of 6.8.3.1 for 1 min with a test voltage of 1,5 times working voltage for BASIC or SUPPLEMENTARY INSULATION		N/A
	value for REINFORCED INSULATION are twice the WORKING VOLTAGE		N/A
	Complies as applicable:		—
	1) ENCLOSURE or PROTECTIVE BARRIER of Clause 8		N/A
	2) moulded and potted parts requirements of 6.7.3.4.2		N/A
	3) inner layers of printed wiring boards requirements of 6.7.3.4.3		N/A
	4) thin-film insulation requirements of 6.7.3.4.4		N/A
6.7.3.4.2	Moulded and potted parts		—

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Conductors between same two layers are separated by applicable distances of Table 8		N/A
6.7.3.4.3	Inner insulation layers of printed wiring boards		—
	Separated by at least the applicable distances of Table 8 between same two layers		N/A
	REINFORCED INSULATION have adequate electric strength; one of following methods used:		—
	a) thickness at least applicable distance of Table 8		N/A
	b) insulation is assembled of minimum two separate layers, each RATED for test voltage of Table 6 for BASIC INSULATION		N/A
	c) insulation is assembled of min. two separate layers, where the combination is RATED for 1,6 times the test voltage of Table 6		N/A
6.7.3.4.4	Thin-film insulation		—
	Conductors between same two layers are separated by applicable CLEARANCES and CREEPAGE DISTANCE of 6.7.3.2 and 6.7.3.3		N/A
	REINFORCED INSULATION have adequate electric strength; one of following methods used:		—
	a) thickness at least applicable distance of Table 8		N/A
	b) insulation is assembled of min. two separate layers, each RATED for test voltage of Table 6 for BASIC INSULATION		N/A
	c) insulation is assembled of min. three separate layers, where the combination of two layers passed voltage tests with 1,6 time values of Table 6:		—
	a.c. test of 6.8.3.1; or		N/A
	d.c. test of 6.8.3.2 for circuits stressed only by d.c. voltages		N/A
6.8	Procedure for voltage tests		P
6.9	Constructional requirements for protection against electric shock		P
6.9.1	General		P
	If a failure could cause a HAZARD:		—
	a) security of wiring connections		P
	b) screws securing removable covers		P
	c) accidental loosening		P
	d) CLEARANCES and CREEPAGE DISTANCES not reduced below the values of basic insulation by loosening of parts or wires		P
6.9.2	Insulating materials		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Material not to be used for safety relevant insulation:		—
	a) easily damaged materials not used		P
	b) non-impregnated hygroscopic materials not used		P
6.9.3	Colour coding		N/A
	Green-and-yellow insulation shall not be used except:		—
	a) protective earth conductors;	No protective earth conductors	N/A
	b) PROTECTIVE BONDING conductors;	No PROTECTIVE BONDING conductors	N/A
	c) potential equalization conductors;	No potential equalization conductors	N/A
	d) functional earth conductors	No functional earth conductors	N/A
6.9.101	<i>Hand Held multimeter RATINGS</i>	CAT IV 1000V	P
	<i>Measuring circuit TERMINALS are RATED min. 300 V a.c. r.m.s. to earth, and;</i>	1000V	P
	<i>MEASUREMENT CATEGORY III or IV.</i>	CAT IV	P
	<i>The RATED voltage of measuring circuit TERMINALS is equal to or higher than the RATED voltage to earth</i>	1000V	P
6.10	Connection to MAINS supply source and connections between parts of equipment	Battery operated	N/A
6.10.1	MAINS supply cords	No MAINS supply cords	N/A
	RATED for maximum equipment current (see 5.1.3 c)		N/A
	Cable complies with IEC 60227 or IEC 60245		N/A
	Heat-resistant if likely to contact hot parts		N/A
	Temperature RATING (cord and inlet) :		—
	Green/yellow used only for connection to PROTECTIVE CONDUCTOR TERMINALS		N/A
	Detachable cords with IEC 60320 MAINS connectors:		—
	Conform to IEC 60799; or		N/A
	Have the current RATING of the MAINS connector		N/A
6.10.2	Fitting of non-detachable MAINS supply cords		N/A
6.10.2.1	Cord entry		—
	a) inlet or bushing with a smoothly rounded opening; or		N/A
	b) insulated cord guard protruding >5 D (diameter)		N/A
6.10.2.2	Cord anchorage		—
	Protective earth conductor is the last to take the strain		N/A
	a) cord is not clamped by direct pressure from a screw		N/A
	b) knots are not used		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	c) cannot push the cord into the equipment to cause a HAZARD		N/A
	d) no failure of cord insulation in anchorage with metal parts		N/A
	e) not to be loosened without a tool		N/A
	f) cord replacement does not cause a HAZARD and method of strain relief is clear		N/A
	Push-pull and or torque test		N/A
6.10.3	Plugs and connectors		N/A
	MAINS supply plugs, connectors etc., conform with relevant specifications		N/A
	If equipment supplied at voltages below 6.3.2.a) or from a sole source:		—
	Plugs of supply cords do not fit MAINS sockets above rated SUPPLY voltage		N/A
	MAINS type plugs used only for connection to MAINS supply		N/A
	Plug pins which receive a charge from an internal capacitor		N/A
	Accessory MAINS socket outlets:		—
	a) marking if accepts a standard MAINS supply plug (see 5.1.3e)		N/A
	b) input has a protective earth conductor if outlet has EARTH TERMINAL CONTACT		N/A
6.11	Disconnection from supply source	Battery operated	N/A
6.11.1	Disconnects all current-carrying conductors		N/A
6.11.2	Exceptions		N/A
6.11.3	Requirements according to type of equipment		N/A
6.11.3.1	PERMANENTLY CONNECTED EQUIPMENT and multi-phase equipment		N/A
	Employs switch or circuit-breaker		N/A
	If switch or circuit-breaker is not part of the equipment, documentation requires:		—
	a) switch or circuit-breaker to be included in building installation		N/A
	b) suitable location easily reached		N/A
	c) marking as disconnecting for the equipment		N/A
6.11.3.2	Single-phase cord-connected equipment		N/A
	Equipment is provided with one of the following:		—
	a) switch or circuit-breaker		N/A
	b) appliance coupler (disconnectable without tool)		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	c) separable plug (without locking device)		N/A
6.11.4	Disconnecting devices		N/A
6.11.4.1	General		N/A
	Disconnecting device part of equipment		N/A
	Electrically close to the SUPPLY		N/A
	Power-consuming components not electrically located between the supply source and the disconnecting device		N/A
	Except electromagnetic interference suppression circuits permitted to be located on the supply side of the disconnecting device		N/A
6.11.4.2	Switches and circuit-breakers		N/A
	When used as disconnection device:		—
	Circuit breaker meets the relevant requirements IEC 60947-2 and is suitable for the application		N/A
	Switch meets the relevant requirements IEC 60947-3 and is suitable for the application		—
	Marked to indicate function		—
	Not incorporated in MAINS cord		N/A
	Does not interrupt PROTECTIVE EARTH CONDUCTOR		N/A
6.11.4.3	Appliance couplers and plugs		N/A
	Where an appliance coupler or separable plug is used as the disconnecting device (see 6.11.3.2):		—
	Readily identifiable and easily reached by the operator		N/A
	Single-phase portable equipment cord length not more than 3 m		N/A
	PROTECTIVE EARTH CONDUCTOR connected first and disconnected last		N/A

7	PROTECTION AGAINST MECHANICAL HAZARDS		P
7.1	General		P
	Equipment does not cause a mechanical HAZARD in NORMAL nor in SINGLE FAULT CONDITION		P
	Conformity is checked by 7.2 to 7.7		P
7.2	Sharp edges		P
	Easily-touched parts are smooth and rounded		P
	Do not cause injury during NORMAL USE and		P
	Do not cause injury during SINGLE FAULT CONDITION		P
7.3	Moving parts	No moving parts	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
7.3.1	General		N/A
	HAZARDS from moving parts limited to a tolerable level with the conditions specified in 7.3.2 and 7.3.5		N/A
	RISK assessment in accordance with 7.3.3 carried out		N/A
7.3.2	Exceptions		N/A
	Access to HAZARDOUS moving parts permitted under following circumstances:		—
	a) obviously intended to operate on parts or materials external of the equipment		N/A
	inadvertent touching of moving parts minimized by equipment design (e .g. guards or handles)		N/A
	b) If OPERATOR access is unavoidable outside NORMAL USE following precautions have been taken:		—
	1) access requires TOOL		N/A
	2) statement about training in the instructions		N/A
	3) warning markings on covers prohibiting access by untrained OPERATORS		N/A
	or symbol 14 with full details in documentation		N/A
7.3.3	RISK assessment for mechanical HAZARDS to body parts		N/A
	RISK is reduced to a tolerable level by protective measures as specified in Table 12		N/A
	Minimum protective measures:		—
	A. Low level measures		N/A
	B. Moderate measures		N/A
	C. Stringent measures		N/A
7.3.4	Limitation of force and pressure		N/A
	Following levels are met in NORMAL and SINGLE FAULT CONDITION:		—
	Continuous contact pressure below 50 N / cm ² with force below 150 N		N/A
	Temporary force below 250 N for an area at least of 3 cm ² for a maximum duration of 0,75 s		N/A
7.3.5	Gap limitations between moving parts		N/A
7.3.5.1	Access normally allowed		—
	If levels of 7.3.4 exceeded and a body part may be inserted minimum gap as specified in Table 13 assured in NORMAL and in SINGLE FAULT CONDITION		N/A
7.3.5.2	Access normally prevented		—
	Maximum gap as specified in Table 14 assured in NORMAL and in SINGLE FAULT CONDITION		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

7.4	Stability	Hand-held equipment, no such requirement	N/A
	Equipment not secured to building structure is physical stable		N/A
	Stability maintained after opening of drawers etc. by automatic means, or		N/A
	warning marking requires the application of means		N/A
	Compliance checked by following tests as applicable:		—
	a) 10° tilt test for other than handheld equipment		N/A
	b) multi-directional force test for equipment exceeds height of 1 m and mass of 25 kg		N/A
	c) downward force test for floor-standing equipment		N/A
	d) overload test with 4 times maximum load for castor or support foot that supports greatest load, or		N/A
	e) castor or support foot that supports greatest load removed from equipment		N/A
7.5	Provisions for lifting and carrying	Hand-held equipment, no such requirement	N/A
7.5.1	General		N/A
	Equipment more than 18 kg :		N/A
	Has means for lifting or carrying; or		N/A
	Directions are given in documentation		N/A
7.5.2	Handles and grips		N/A
	Handles or grips withstand four times weight		N/A
7.5.3	Lifting devices and supporting parts		N/A
	RATED for maximum load; or		N/A
	Tested with four times maximum static load		N/A
7.6	Wall mounting	Hand-held equipment, no such requirement	N/A
	Mounting brackets withstand four times weight		N/A
	One fastener removed and test repeated with two times weight		N/A
7.7	Expelled parts	No such parts	N/A
	Equipment contains or limits the energy		N/A
	Protection not removable without the aid of a tool		N/A

8	RESISTANCE TO MECHANICAL STRESSES		P
8.1	General		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Equipment does not cause a HAZARD when subjected to mechanical stresses in NORMAL USE		P
	Normal protection level is 5 J	Hand-held equipment No impact test required	N/A
	Levels below 5 J but not less than 1 J are acceptable if all of the following criteria are met:		—
	a) Lower level justified by RISK assessment of manufacturer		N/A
	b) Equipment installed in its intended application is not easily touched		N/A
	c) Only occasional access during NORMAL USE		N/A
	d) IK code in accordance to IEC 62262 marked or symbol 14 used with full information in the documentation		N/A
	for non-metallic ENCLOSURES rated below 2 °C ambient temperature value chosen for minimum RATED temperature		N/A
	impact energies between IK values, the IK code marked for nearest lower value		N/A
	Conformity is checked by performing following tests:		—
	1) Static test of 8.2.1		P
	2) Impact test of 8.2.2 with 5 J except for HAND-HELD EQUIPMENT		N/A
	if specified impact energy is not 5 J alternate method of IEC 62262 used		N/A
	3) Drop test of 8.3.1 or 8.3.2 except for FIXED EQUIPMENT and equipment with mass over 100 kg		P
	Equipment RATED with an impact rating of IK 08 that obviously meets the criteria		N/A
	After the tests inspection with following results:		—
	– HAZARDOUS LIVE parts above the limits of 6.3.2 not ACCESSIBLE		P
	– insulation pass the voltage tests of 6.8		P
	i) No leaks of corrosive and harmful substances		P
	ii) ENCLOSURE shows no cracks resulting in a HAZARD		P
	iii) CLEARANCES not less than their permitted values		P
	iv) Insulation of internal wiring remains undamaged		P
	v) PROTECTIVE BARRIERS not damaged or loosened		P
	vi) No moving parts exposed, except permitted by 7.3	No moving parts	N/A
	vii) No damage which could cause spread of fire		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	ENCLOSURE rigidity test		P
8.2.1	Static test		P
	- 30 N with 12 mm rod applied to each part of ENCLOSURE		P
	- in case of doubt test conducted at maximum RATED ambient temperature	55°C	P
8.2.2	Impact test	Hand-held equipment No impact test required	N/A
	Impact applied to any part of ENCLOSURE causing a HAZARD if damaged		N/A
	Impact energy level and corresponding IK code :		—
	Non-metallic ENCLOSURES cooled to minimum RATED ambient temperature if below 2 °C		N/A
8.3	Drop test		P
8.3.1	Other than HAND-HELD and DIRECT-PLUG-IN EQUIPMENT	HAND-HELD EQUIPMENT	N/A
	Tests conducted with a drop height or angle of..... :		—
8.3.2	HAND-HELD and DIRECT-PLUG-IN EQUIPMENT		P
	Non-metallic ENCLOSURES cooled to minimum RATED ambient temperature if below 2 °C	-40°C	P
	Drop test conducted with an height of 1 m		P

9	PROTECTION AGAINST THE SPREAD OF FIRE		P
9.1	General		P
	No spread of fire in NORMAL and SINGLE FAULT CONDITION		P
	MAINS supplied equipment meets requirements of 9.6 additionally		P
	Conformity is checked by minimum one or a combination of the following (see Figure 11):		—
	a) SINGLE FAULT test of 4.4; or		P
	b) Application of 9.2 (eliminating or reducing the sources of ignition); or		N/A
	c) Application of 9.3 (containment of fire within the equipment)		P
9.2	Eliminating or reducing the sources of ignition within the equipment		N/A
	a) 1) Limited-energy circuit (see 9.4); or		N/A
	2) BASIC INSULATION provided for parts of different potential; or		N/A
	Bridging the insulation does not cause ignition		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	b) Surface temperature of liquids and parts (see 9.5)		N/A
	c) No ignition in circuits designed to produce heat		N/A
9.3	Containment of the fire within the equipment, should it occur		P
9.3.1	General		P
	Spread of fire outside equipment reduced to a tolerable level if:		—
	a) Energizing of the equipment is controlled by an OPERATOR held switch	No such controlled	N/A
	b) ENCLOSURE is conform with constructional requirements of 9.3.2; and		P
	Requirements of 9.5 are met	No flammable liquids	N/A
9.3.2	Constructional requirements		P
	a) Connectors and insulating material have flammability classification V-2 or better	V-0	P
	b) Insulated wires and cables are flame retardant (VW-1 or equivalent)	No such wires and cables	N/A
	c) ENCLOSURE meets following requirements:		—
	1) Bottom and sides in arc of 5 ° (see Figure 13) to non-limited circuits (9.4) meets:		—
	i) no openings; or		P
	ii) perforated as specified in Table 16; or		N/A
	iii) metal screen with a mesh; or		N/A
	iv) baffles as specified in Figure 12		N/A
	2) Material of ENCLOSURE and any baffle or flame barrier is made of:		—
	Metal (except magnesium); or		N/A
	Non-metallic materials have flammability classification V-1 or better	V-0	P
	3) ENCLOSURE and any baffle or flame barrier have adequate rigidity		P
9.4	Limited-energy circuit		N/A
	a) Potential not more than 30 r.m.s. and 42,4 V peak, or 60 V d.c.		N/A
	b) Current limited by one of following means:		—
	1) Inherently or by impedance (see Table 17); or		N/A
	2) Overcurrent protective device (see Table 18); or		N/A
	3) A regulating network limits also in SINGLE FAULT CONDITION (see Table 17)		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	c) Is separated by at least BASIC INSULATION		N/A
	Fuse or a nonadjustable electromechanical device is used		N/A
9.5	Requirements for equipment containing or using flammable liquids	No flammable liquids	N/A
	Flammable liquids contained in or specified for use with equipment do not cause spread of fire		N/A
	RISK is reduced to a tolerable level:		—
	a) The temperature of surface or parts in contact with flammable liquids is 25 °C below fire point		N/A
	b) The quantity of liquid is limited		N/A
	c) Flames are contained within the equipment		N/A
	Detailed instructions for RISK-reduction provided		N/A
9.6	Overcurrent protection		N/A
9.6.1	General		N/A
	MAINS supplied equipment protected	Battery operated	N/A
	BASIC INSULATION between MAINS parts of opposite polarity provided		N/A
	Overcurrent protection devices not fitted in the protective conductor		N/A
	Fuses or single-pole circuit-breakers not fitted in neutral (multi-phase equipment)		N/A
9.6.2	PERMANENTLY CONNECTED EQUIPMENT		N/A
	Overcurrent protection device:		—
	Fitted within the equipment; or		N/A
	Specified in manufacturer's instructions		N/A
9.6.3	Other equipment		N/A
	Protection within the equipment		N/A

10	EQUIPMENT TEMPERATURE LIMITS AND RESISTANCE TO HEAT		P
10.1	Surface temperature limits for protection against burns		P
	Easily touched surfaces within the limits in NORMAL and in SINGLE FAULT CONDITION:		—
	– at an specified ambient temperature of 40 °C		N/A
	– for equipment rated above 40 °C ambient temperature limits not exceeded raised by the difference to 40 °C	55°C	P
	Heated surfaces necessary for functional reasons exceeding specified values:	No parts exceed specified values	—

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	– Are recognizable as such by appearance or function; or		N/A
	– Are marked with symbol 13		N/A
	– Guards are not removable without tool		N/A
10.2	Temperatures of windings	No windings	N/A
	Limits not exceeded in:		—
	NORMAL CONDITION		N/A
	SINGLE FAULT CONDITION		N/A
10.3	Other temperature measurements		P
	Following measurements conducted if applicable:		—
	a) Value of 60 °C of field-wiring terminal box not exceeded	No field-wiring terminal box	N/A
	b) Surface of flammable liquids and parts in contact with this liquids	No flammable liquids	N/A
	c) Surface of non-metallic ENCLOSURES		P
	d) Parts made of insulating material supporting parts connected to MAINS supply	Battery operated	N/A
	e) Terminals carrying a current more than 0,5 A	No such terminals Current mearing terminals fixed by metal conductor and screw	N/A
10.4	Conduct of temperature tests		P
10.4.1	General		P
	Tests conducted under reference test conditions and manufacturer's instructions		P
	Tests alternatively conducted at the least favourable ambient temperature within the RATED ambient temperature..... :		—
10.4.2	Temperature measurement of heating equipment	No heating devices	N/A
	Tests conducted in test corner		N/A
10.4.3	Equipment intended for installation in a cabinet or wall		N/A
	Equipment built in as specified in installation instructions		N/A
10.5	Resistance to heat		P
10.5.1	Integrity of CLEARANCE and CREEPAGE DISTANCES		P
10.5.2	Non-metallic ENCLOSURES		P
	Within 10 min after treatment:		—
	Equipment subjected to suitable stresses of 8.2 and 8.3 complying with criteria of 8.1		P
10.5.3	Insulating material		N/A
	a) Parts supporting parts connected to MAINS supply	Battery operated	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033

Clause	Requirement + Test	Result - Remark	Verdict
	b) TERMINALS carrying a current more than 0,5 A	No such terminals Current mearing terminals fixed by metal conductor and screw	N/A
	Examination of material data; or		N/A
	in case of doubt:		N/A
	1) Ball pressure test; or		N/A
	2) Vicat softening test of ISO 306		N/A

11	PROTECTION AGAINST HAZARDS FROM FLUIDS AND SOLID FOREIGN OBJECTS		P
11.1	General		P
	Protection to OPERATORS and surrounding area provided by EQUIPMENT		P
	All fluids specified by manufacturer considered	No specified fluids	N/A
11.2	Cleaning		N/A
11.3	Spillage		N/A
11.4	Overflow		N/A
11.5	Battery electrolyte		P
	Battery electrolyte leakage presents no HAZARD		P
11.6	Equipment RATED with a degree of ingress protection (IP code)		P
11.6.1	General		P
	Equipment marked with IP code: IP 67		—
	Conditions specified in the documentation		P
11.6.2	Conditions for testing		P
	Equipment in clean and new condition, all parts in place and mounted as specified by manufacturer		P
	Complete equipment tested, or		P
	representative parts tested	Complete equipment	N/A
	HAND-HELD EQUIPMENT and PORTABLE EQUIPMENT placed in least favourable position of NORMAL use		P
	Other equipment positioned or installed as specified	Hand-held equipment	N/A
	TERMINALS provided with protective cap or cover, are installed as specified by manufacturer		P
	The equipment is operating (energized) during the treatment except:		—
	a) If manufacturer specifies degrees of protection for non-operating (de-energized) equipment, or	Operating or non-operating not affect the test results	N/A
	b) Equipment is operating or non-operating during the treatment with does not affect the test results		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
11.6.3	Protection against solid foreign objects (including dust)		P
	Applicable test of IEC 60529 for protection against solid foreign objects conducted		P
	Additionally inspection of equipment resulted:		—
	a) No deposit on insulation parts that could lead to a HAZARD		P
	b) No created accumulations that have the potential to cause spread of fire		P
11.6.4	Protection against water		P
	Applicable test of IEC 60529 for protection against water conducted		P
	If any water has entered, safety is not impaired, inspection of equipment resulted:		—
	a) No deposit on insulation parts that could lead to a HAZARD	No water ingress	P
	b) Water has not reached hazardous live parts or windings which are not designed to operate when wet	No water ingress	P
	c) No accumulations near the end of cable nor enter the cable where it could cause a HAZARD	No water ingress	P
	d) No accumulations where it could lead to a HAZARD taking in consideration movement of the equipment	No water ingress	P
11.7	Fluid pressure and leakage	No fluid used	N/A
11.7.1	Maximum pressure.....:		—
	Maximum pressure of any part does not exceed P_{RATED}		N/A
11.7.2	Leakage and rupture at high pressure		N/A
	Fluid-containing parts checked by inspection or if a HAZARD could arise subjected to hydraulic test, if:		—
	a) product of pressure and volume > 200 kPa·l; and		N/A
	b) pressure > 50 kPa		N/A
	Safety evidence established by calculation in acc. to national authorities (e.g. Pressure Equipment Directive 2014/68/EU)		N/A
	Parts of refrigerating systems meets pressure-related requirements of EN 378-2 or IEC 60335-2-89 as applicable		N/A
11.7.3	Leakage from low-pressure parts		N/A
11.7.4	Overpressure safety device		N/A
	Does not operate in NORMAL USE		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033

Clause	Requirement + Test	Result - Remark	Verdict
	a) Connected as close as possible to parts intended to be protected		N/A
	b) Easy access for inspection, maintenance and repair		N/A
	c) Adjustment only with TOOL		N/A
	d) No discharge towards person		N/A
	e) No HAZARD from deposit of discharged material		N/A
	f) Adequate discharge capacity		N/A
	No shut-off valve between overpressure safety device and protected parts		N/A

12	PROTECTION AGAINST RADIATION, INCLUDING LASER SOURCES, AND AGAINST SONIC AND ULTRASONIC PRESSURE		P
12.1	General		P
	Equipment provides protection		N/A
12.2	Equipment producing ionizing radiation	No Ionizing radiation	N/A
12.2.1	Ionizing radiation		N/A
12.2.1.1	General		N/A
	Equipment meets the following requirements:		—
	a) if intended to emit radiation meets requirements of 12.2.1.2; or		N/A
	tested, classified and marked in accordance to IEC 62598		N/A
	b) if only emits stray radiation meets requirements of 12.2.1.3		N/A
12.2.1.2	Equipment intended to emit radiation	Not emit radiation	—
	Effective dose rate of radiation measured :		—
	If dose rate exceeds 5 µSv/h marked with the following:		—
	a) symbol 17 (ISO 361)		N/A
	b) abbreviations of the radionuclides :		—
	c) with maximum dose at 1 m; or..... :		—
	with dose rate value between 1 µSv/h and 5 µSv/h in m :		—
12.2.1.3	Equipment not intended to emit radiation		—
	Limit for unintended stray radiation of 1 µSv/h at any easily reached point kept :		N/A
12.2.2	Accelerated electrons		N/A
	Compartments opened only by the use of a TOOL		N/A
12.3	Optical radiation		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	No unintentional HAZARDOUS escape of optical radiation as ultraviolet, visible or infrared radiation, including light emitting diodes:		—
	– Checked by inspection; and		P
	– Radiation sources assessed in acc. to the requirements of IEC 62471, except for sources considered to be safe (Table 22) or conditionally safe (Table 23).	LCD screen considered to be safety(Table 22)	P
	– Lamp and lamp systems assessed to Risk Groups 1, 2, or 3 of IEC 62471 are labelled in acc. to IEC 62471-2		N/A
	– If labelling impractical, lamp or lamp systems marked with symbol 14		N/A
	– Protective measures, restrictions on use, and operating instructions that may be necessary are provided, including the applicable conditions of use of Table 23.		N/A
12.4	Microwave radiation	No microwave radiation	N/A
	Power density does not exceed 10 W/m ²		N/A
12.5	Sonic and ultrasonic pressure	No noise	N/A
12.5.1	Sound level		N/A
	No HAZARDOUS sound emission		N/A
	Maximum sound pressure level measured and calculated for maximum sound power level as specified in ISO 3746 or ISO 9614-1		N/A
	Instruction describes measures for protection		N/A
12.5.2	Ultrasonic pressure		N/A
	Equipment not intended to emit ultrasound does not exceed limit of 110 dB between 20 kHz and 100 kHz		N/A
	Equipment intended to emit ultrasound:		N/A
	Outside useful beam does not exceed limit of 110 dB between 20 kHz and 100 kHz		N/A
	If inside useful beam above values exceeded:		—
	Marked with Symbol 14 of Table 1		N/A
	and following information in the documentation:		—
	a) dimensions of useful beam		N/A
	b) area where ultrasonic pressure exceed 110 dB		N/A
	c) maximum sound pressure inside beam area		N/A
12.6	Laser sources	No laser source	N/A
	Equipment meets requirements of IEC 60825-1		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
13	PROTECTION AGAINST LIBERATED GASES AND SUBSTANCES, EXPLOSION AND IMPLOSION		P
13.1	Poisonous and injurious gases and substances		P
	No hazardous substances liberated in NORMAL CONDITION and in SINGLE FAULT CONDITION		P
	If potentially-hazardous substances are liberated:	No such gases and substances	—
	Operator is not directly exposed to a quantity of the substance that could cause harm		N/A
	Requirements to discharge of hazardous substances during NORMAL operation in accordance to manufacturer's instructions not considered as liberation		N/A
	Attached data/test reports demonstrate conformity		N/A
13.2	Explosion and implosion		N/A
13.2.1	Components		N/A
	Components liable to explode:		—
	Pressure release device provided; or		N/A
	Apparatus incorporates operator protection (see also 7.7)		N/A
	Pressure release device:		—
	Discharge without danger		N/A
	Cannot be obstructed		N/A
13.2.2	Batteries and battery charging		P
	If explosion or fire HAZARD could occur:		—
	Protection incorporated in the equipment; or		N/A
	Instructions specify batteries with built-in protection		P
	In case of wrong type of battery used:		—
	No HAZARD; or		P
	Warning by marking and within instructions		N/A
	Equipment with means to charge rechargeable batteries:	No charge function	—
	Warning against the charging of non-rechargeable batteries; and		N/A
	Type of rechargeable battery indicated; or		N/A
	Symbol 14 used		N/A
	Battery compartment design		P
	Single component failure		P
	Polarity reversal test		P
13.2.3	Implosion of cathode ray tubes		N/A
	If maximum face dimensions > 160 mm :		—

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Intrinsically protected and correctly mounted; or		N/A
	ENCLOSURE provides protection:		N/A
	If non-intrinsically protected:		—
	Screen not removable without TOOL		N/A
	If glass screen, not in contact with surface of tube		N/A

14	COMPONENTS AND SUBASSEMBLIES		P
14.1	General		P
	Where safety is involved, components and subassemblies meet relevant requirements		P
14.2	Motors	No motors	N/A
14.2.1	Motor temperatures		N/A
	Does not present a HAZARD when stopped or prevented from starting; or		N/A
	Protected by over-temperature or thermal protection device conform with 14.3		N/A
14.2.2	Series excitation motors		N/A
	Connected direct to device, if overspeeding causes a HAZARD		N/A
14.3	Overtemperature protection devices	No such devices	N/A
	Devices operating in a SINGLE FAULT CONDITION		N/A
	a) Reliable function is ensured		N/A
	b) RATED to interrupt maximum current and voltage		N/A
	c) Does not operate in NORMAL USE		N/A
	If self-resetting device used to prevent a HAZARD, protected part requires intervention before restarting		N/A
14.4	Fuse holders		N/A
	No access to HAZARDOUS LIVE parts	No such fuse holders	N/A
14.5	MAINS voltage selecting devices	No such devices	N/A
	Accidental change not possible		N/A
14.6	MAINS transformers tested outside equipment	No MAINS transformers	N/A
14.7	Printed wiring boards		P
	Data shows conformity with V-1 of IEC 60695-11-10 or better; or	V-0	P
	Test shows conformity with V-1 of IEC 60695-11-10 or better		N/A
	Not applicable for printed wiring boards with limited-energy circuits (9.4)		N/A
14.8	Not used		—

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033

Clause	Requirement + Test	Result - Remark	Verdict
14.101	<i>Probe assemblies and accessories</i>		P
	<i>Probe assemblies and accessories within the scope of IEC 61010-031, and current sensors within the scope of IEC61010-2-032.</i>		P
	<i>Probe assemblies and accessories meet IEC 61010-031 :</i>		P

15	PROTECTION BY INTERLOCKS		N/A
15.1	General		N/A
	Interlocks are designed to remove a HAZARD before OPERATOR exposed		N/A
15.2	Prevention of reactivation		N/A
15.3	Reliability		N/A
	Single fault unlikely to occur; or		N/A
	Cannot cause a HAZARD		N/A

16	HAZARDS RESULTING FROM APPLICATION		P
16.1	REASONABLY FORESEEABLE MISUSE		P
	No HAZARDS arising from settings not intended and not described in the instructions		P
	Other cases of REASONABLY FORESEEABLE MISUSE addressed by RISK assessment		N/A
16.2	Ergonomic aspects	No such hazard	N/A
	Factors giving rise to a HAZARD the RISK assessment is reflecting those aspects:		—
	a) limitation of body dimensions		N/A
	b) displays and indicators		N/A
	c) accessibility and conventions of controls		N/A
	d) arrangement of TERMINALS		N/A

17	RISK ASSESSMENT		N/A
	RISK assessment conducted, if HAZARD might arise and not covered by Clauses 6 to 16	All risk covered by clauses 6 to 16	N/A
	TOLERABLE RISK achieved by iterative documented process covering the following:		—
	a) RISK analysis		N/A
	Identifies HAZARDS and estimates RISK		N/A
	b) RISK evaluation		N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	Plan to judge acceptability of resulting RISK level based on the estimated severity and likelihood of a RISK		N/A
	c) RISK reduction		N/A
	Initial RISK reduced by counter measures;		N/A
	Repeated RISK evaluation without new RISKS introduced		N/A
	RISKS remaining after RISK assessment addressed in instructions to RESPONSIBLE BODY:		—
	Information contained how to mitigate these RISKS		N/A
	Following principles in methods of RISK reduction applied by manufacturer in given order:		—
	1) RISKS eliminated or reduced as far as possible		N/A
	2) Protective measures taken for RISKS that cannot be eliminated		N/A
	3) User information about residual RISK due to any defect of the protective measures		N/A
	Indication of particular training is required		N/A
	Specification of the need for personal protective equipment		N/A
	Conformity checked by evaluation of the RISK assessment documentation		N/A

101	Measuring circuits		P
101.1	General		P
	<i>The current sensor provides protection against HAZARDS resulting from normal use and REASONABLY FORESEEABLE MISUSE of measuring circuits, as specified:</i>		—
	<i>a) Current measuring circuit did not interrupt the . circuit being measured during range changing, or</i>	No such hazard	N/A
	<i>. during the use of current sensors with an internal current transformer</i>	No current transformer	N/A
	<i>b) Electrical quantity within specification for any TERMINAL did not cause a HAZARD when it was applied to that TERMINAL or any other compatible TERMINAL, with the range and function settings set in any possible manner</i>		P
	<i>c) Any interconnection between the current sensor . and other devices or accessories did not cause a HAZARD while the current sensor is used for measurement purposes</i>		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	d) <i>TEMPORARY OVERVOLTAGE or TRANSIENT OVERVOLTAGE applied on the measuring circuits TERMINALS in voltage measurement function did not cause a HAZARD</i>	No such hazard	N/A
	e) <i>Other HAZARDS that could result from REASONABLY FORESEEABLE MISUSE were addressed by RISK assessment</i>	No such hazard	N/A
101.2	Current measuring circuits		P
	<i>When range changing takes place, there is no interruption which could cause a HAZARD.....:</i>		P
	<i>Current transformers without internal protection are adequately protected from interruption</i>	No internal current transformers	N/A
101.3	Protection against mismatches of inputs and ranges		P
101.3.1	<i>General</i>		P
	<i>In NORMAL CONDITION and for REASONABLY FORESEEABLE MISUSE no HAZARD occurred when the highest RATED voltage or current of a measuring circuit TERMINAL is applied to that terminal or to any other compatible TERMINAL, with any combination of function and range settings</i>		P
	<i>TERMINALS are clearly marked and do not retain the connectors of probe or accessory, therefore do not need to be tested. Terminals only accessible by use of a tool do not need to meet the requirement of 101.3.1</i>		—
	<i>The current sensor must provide protection against these HAZARDS. One of the following techniques used:</i>		—
	a) <i>Certified overcurrent protection device to interrupt short-circuit currents before a HAZARD arises used</i>		P
	<i>Tests and requirements of 101.3.2 applied.</i>		P
	b) <i>Uncertified current limitation device, an impedance or a combination of both used</i>		P
	<i>Requirements and tests of 101.3.3 applied</i>		P
101.3.2	<i>Protection by a certified overcurrent protection device</i>		P
	<i>Certified overcurrent protection device used</i>	Fuses	—
	<i>Overcurrent protection device suitable if it is certified by an independent laboratory and if all of the following requirements are met:</i>		—
	a) <i>The a.c. and d.c. RATED voltages of the overcurrent protection device are at least as high as, respectively, the highest a.c. and d.c. RATED voltages of any measuring circuit TERMINAL on the current sensor.</i>		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	<i>RATED a.c. / d.c. voltages of overcurrent protection device</i>	1000V	—
	<i>Highest RATED a.c. / d.c. voltages of measuring circuit TERMINAL</i>	1000V	—
	<i>b)The RATED time-current characteristic (speed) of the overcurrent protection device was such that no HAZARD will result from any possible combination of RATED input voltages, TERMINALS, and range selection</i>	FF	P
	<i>c)The a.c. and d.c. RATED breaking capacities of the overcurrent protection device exceed, respectively, the possible a.c. and d.c. short- circuit currents.</i>		P
	<i>RATED a.c. / d.c. breaking capacities</i>	10kA for 600mA fuse 30kA for 11A fuse	—
	<i>Calculated short-circuit currents a.c. / d.c.</i>	8.2kA for 600mA fuse 462A for 11A fuse	—
	<i>Impedance of measuring circuit incl. leads</i>	0.122Ω for A-COM 2.167Ω for mA-COM	—
	<i>For measurement categories II and III, the possible a.c. short-circuit current does not exceed the applicable values of Table AA.1.....</i>	Less than 50kA	—
	<i>Spacings surrounding the overcurrent protection device in the current sensor and following the protection device in the measuring circuit are sufficiently large to prevent arcing after the protection device opens.</i>		P
	<i>No damage to the equipment occurred during and after the test</i>		P
101.3.3	<i>Protection by uncertified current limitation devices or by impedances</i>		P
	<i>Uncertified overcurrent protection device used.....</i>	A combination of components used	—
	<i>Impedance used for limitation of current by one or more of the following:</i>		—
	<i>a)An appropriate single component which is constructed, selected, and tested so that safety and reliability for protection against relevant HAZARDS are assured:</i>	A combination of components used	—
	<i>1)RATED for the maximum voltage that may be present in NORMAL CONDITION or during the REASONABLY FORESEEABLE MISUSE event</i>		N/A
	<i>2) a resistor, be RATED for twice the power or energy dissipation that may result in NORMAL CONDITION or from the REASONABLY FORESEEABLE MISUSE event.....</i>		N/A


IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	3) applicable CLEARANCE and CREEPAGE AND DISTANCE requirements of Annex K for BASIC INSULATION between its terminations		N/A
	b)A combination of components which:		—
	1)withstand the maximum voltage that may be present in NORMAL CONDITION or during the REASONABLY FORESEEABLE MISUSE event;		P
	2)able to dissipate the power or energy that may result in NORMAL CONDITION or from the REASONABLY FORESEEABLE MISUSE event;		P
	3) . meet the applicable CLEARANCE and CREEPAGE DISTANCE requirements of Annex K for BASIC INSULATION between the terminations of the combination of components		P
	No HAZARD occurred during and after the test		P
	No evidence of fire, arcing, explosion or damage to impedance limitation devices or any component intended to provide protection against electric shock, heat, arc or fire, including the ENCLOSURE and traces on the printed wiring board, during and after the test		P
	The source voltage did not decrease by more than 20 % for more than 10 ms		P
101.3.4	Test leads for the tests of 101.3.2 and 101.3.3		P
	Test of 101.3.2 and 101.3.3 were performed with all tests leads which were specified or supplied by manufacturer with the current sensor or were performed with tests leads that meet the following specifications:	Test leads supplied by manufacturer used without modification	—
	a)length = 1,0 m;		N/A
	b)cross section of the conductor = 1.5 mm ² , stranded copper wire;		N/A
	c) connector compatible with the measuring circuit TERMINALS;		N/A
	d)connection to the test voltage source via bare wire into suitable screw TERMINALS or		N/A
	Thimble connectors (twist-on wire connectors) or		N/A
	Equivalent means of providing a low impedance connection;		N/A
	e)arranged as straight as possible		N/A
	For the purposes of calculation of possible fault current in 101.3.2 and 101.3.3, the value of 30 mΩ can be used for these test leads.		—
	Test leads supplied by manufacturer used without modification		P
101.4	Protection against MAINS overvoltages		P

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	<i>To ensure protection against arc flash or fire, measuring circuits RATED for measuring MAINS voltages have minimum CLEARANCES and CREEPAGE DISTANCES equivalent to BASIC INSULATION between MAINS-connected conductive parts of opposite polarity.</i>		P
	<i>Measuring circuit TERMINALS of voltage measuring circuit rated for:</i>		—
	<i>MEASUREMENT CATEGORIES</i>	CAT IV	—
	<i>Applicable TRANSIENT OVERVOLTAGES</i>	Powered by battery	N/A
	<i>Impulse voltage of Table 104 applied</i>	12000V	P
	<i>Resistance added to adjust the impedance depending of CAT III or IV.....</i>	2Ω	—
	<i>Applied mains voltage of source</i>	400V	—
	<i>Test impulse applied in combination with the MAINS voltage under NORMAL use</i>		P
	<i>Wave shape of each impulse observed and no influence of overvoltage limiting device occurred</i>		P
	<i>Circuit breaker of the MAINS installation has being triggered</i>	No breaker	N/A
	<i>No HAZARD arose in the event that the component ruptured or overheated</i>		P
102	<i>Indicating devices</i>		P
102.1	<i>General</i>		P
102.2	<i>Battery Level</i>		P
	<i>A voltage value displayed by the hand-held multimeters is not affected by the expected variation of its battery voltage.....</i>	No hazard	P
102.3	<i>Over-range</i>		P
	<i>The display gives unambiguous indication of over-range value.....</i>	Display "OL"	P
102.4	<i>Permanent overvoltage</i>		P
	<i>The hand-held multimeter is able to withstand permanent overvoltages and continue to give an unambiguous indication of any HAZARD LIVE voltages up to the max. RATED voltage</i>	Rated 1000V	P
	<i>The value of overvoltage applied to the TERMINALS is based on the TERMINALS' RATED voltage (V).....</i>	Rated 1000V	P
	<i>a) RATED voltage up to 1 000V a.c. r.m.s. the overvoltage value is RATED voltage multiplied by 1.9 without exceeding 1 100V a.c. r. m. s.;</i>	1100Va.c.r.m.s.	P
	<i>b) RATED voltage above 1 000 Va.c. r. m. s., the overvoltage value is the RATED voltage multiplied by 1.1;</i>	Rated 1000V	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
	c) <i>RATED voltage d.c., the overvoltage value is the RATED voltage multiplied by 1.1.</i>	1100Vdc	P
ANNEX F	ROUTINE TESTS		P
	Manufacturer 's declaration		P
Annex K.3	INSULATION FOR CIRCUITS NOT ADDRESSED IN 6.7, K.1, K.2 OR K.101		P
K.101	Insulation requirements for measuring circuits of MEASUREMENT CATEGORIES III and IV		P
K.101.1	General		P
K.101.2	CLEARANCES		P
	For hand-held multimeter intended to be powered from the circuit being measured, CLEARANCES for MAINS CIRCUIT are designed according to the requirements of the RATED MEASUREMENT CATEGORY		P
	Additional marking requirements in 5.1.5.2 and 5.1.5.101		P
	CLEARANCES for measuring circuits of MEASUREMENT CATEGORIES II, III, IV meet Table K.101		P
	Hand-held multimeter rated to operate at an altitude greater than 2000 m, correction factor of Table K.1 of 61010-1 applied	Up to 2000m	N/A
	Voltage tests of 6.8.3.1 or 6.8.3.3 of 61010-1		P
K.101.3	CREEPAGE DISTANCES		P
	The requirements of K.2.3 of 61010-1 applied		P
K.101.4	Solid insulation		P
K.101.4.1	General		P
K.101.4.1.1	Solid insulation withstands the electrical and mechanical stresses that may occur in NORMAL USE in all RATED environmental conditions (see 1.4) during the intended life of the hand-held multimeter		P
	The manufacturer should take the expected life of the hand-held multimeter into account when selecting insulating materials.		P
K.101.4.1.2	Test voltage values for testing the long-term stress of solid insulation are calculated	2200Vrms for BI 4400Vrms for RI	P
K.101.4.1.3	Solid insulation also meets the following requirements as applicable		P
	a) solid insulation used as an ENCLOSURE or PROTECTIVE BARRIER, the requirements of Clause 8		P
	b) moulded and potted parts, the requirements of K.101.4.2	No such insulation	N/A
	c) insulating layers of printed wiring boards, the requirements of K.101.4.3	No such insulation	N/A
	d) thin-film insulations, the requirements of K.101.4.4	No such insulation	N/A

IEC/EN 61010-1 & IEC/EN IEC 61010-2-033			
Clause	Requirement + Test	Result - Remark	Verdict
K.101.4.2	Moulded and potted parts		N/A
	Conductors located between same two layers moulded together are separated by at least the applicable minimum distance of Table K.105		N/A
K.101.4.3	Insulating layers of printed wiring boards		N/A
	For BASIC INSULATION, SUPPLEMENTARY INSULATION and REINFORCED INSULATION, conductors located between the same two layers is separated by at least the applicable minimum distance of Table K.105.		N/A
	REINFORCED INSULATION have adequate electric strength; one of the following methods are used:		N/A
	a) thickness at least the applicable value of Table K.105.		N/A
	b) insulation is assembled from at least two separate layers, each RATED for test voltage of Table K.102 to K.103 for BASIC INSULATION		N/A
	c) insulation is assembled from at least two separate layers, where the combination is RATED for test voltage of Table K.102 to K.103 for REINFORCED INSULATION		N/A
K.101.4.4	Thin-film insulation		N/A
	Conductors between same layers are separated by at least the applicable CLEARANCES and CREEPAGE DISTANCE of K.101.2 and K.101.3		N/A
	REINFORCED INSULATION have adequate electric strength; one of the following methods are used:		N/A
	a) thickness at least the applicable value of Table K.105		N/A
	b) insulation consists of at least two separate layers, each RATED for test voltage of Table K.102 to Table K.10 for BASIC INSULATION		N/A
	c) insulation consists of at least three separate layers, where the combination of two layers passed adequate voltage tests		N/A
	a.c. Voltage tests of K.101.4.1.1		N/A

6.7 **TABLE: Insulation requirements - Block diagram of system -** **Form A.14** **P**

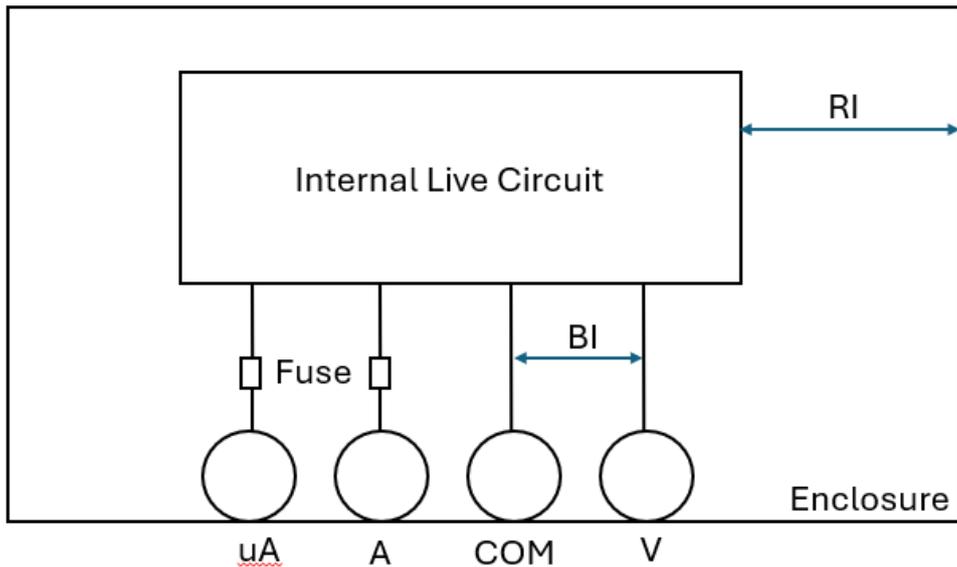

Pollution degree..... : 2 Overvoltage category..... : CAT IV 1000V

Area	Location	Insulation type (NOTE 1)	WORKING VOLTAGE			CLEARANCE (NOTE 3) [mm]	CREEPAGE DISTANCE (NOTE 3)				Test voltage (NOTE 2) [V]	Comments (NOTE 3)
			RMS [V]	Peak [V]	Freq. [kHz]		PWB [mm]	CTI	Other [mm]	CTI		
A	Between internal live circuit and accessible part (near RV2 beside enclosure)	RI	1000	-	-	23.9	-	-	23.9	I	12688	1min
B	Between internal live circuit and accessible part (near Q2 beside screw)	RI	1000	-	-	23.9	-	-	23.9	I	12688	1min
C	Between internal live circuit and accessible part (near fuse beside screw)	RI	1000	-	-	23.9	-	-	23.9	I	12688	1min
D	Between internal live circuit and accessible part (near battery beside screw)	RI	1000	-	-	23.9	-	-	23.9	I	12688	1min

6.7		TABLE: Insulation requirements - Block diagram of system -										Form A.14	P
E	Between internal live circuit and accessible part (near button)	RI	1000	-	-	23.9	-	-	23.9	I	12688	1min	
F	Between internal live circuit and accessible part (near rotary knob)	RI	1000	-	-	23.9	-	-	23.9	I	12688	1min	
G	Between V and COM (On PCB)	BI	1000	-	-	14.0	14.0	-	-	I	8044	1min	
NOTE 1 – Type of insulation: BI = BASIC INSULATION DI = DOUBLE INSULATION PI = PROTECTIVE IMPEDANCE RI = Reinforced INSULATION SI = Supplementary INSULATION see also Form A.15 for further details		NOTE 2 - Types of voltage Peak impulse test voltage (pulse) r.m.s. d.c. peak				NOTE 3 - OVERVOLTAGE CATEGORIES or POLLUTION DEGREES which differ should be shown under "Comments"							
<p>Supplementary Information: For CAT IV 1000V CL=14.0mm(BI) 23.9mm(RI)</p> <p>For hand-held multimeter and powered from battery, material group I used. Cr=Cl=14.0mm(BI) 23.9mm(RI)</p> <p>The material for enclosure and LCD is required a thermal cycling test.</p>													

6.7		TABLE: Insulation requirements - CLEARANCES and CREEPAGES				Form A.15				P		
6.2.2		Examination				6.5.4		Protective impedance		—		
6.4.2		ENCLOSURES and protective barriers				6.5.6		Current- or voltage-limiting device		—		
6.4.4		Impedance				9.6.1		BASIC INSULATION between opposite polarity		—		
Area	Location (See Form A.14)	Insulation type (NOTE 1)	WORKING VOLTAGE (NOTE 2)			CLEARANCE		CREEPAGE DISTANCE		CTI	Verdict	Comments
			RMS [V]	Peak [V]	Frequency [kHz]	Required [mm]	Measured [mm]	Required [mm]	Measured [mm]			
A	Between internal live circuit and accessible part (near RV2 beside enclosure)	RI	1000	-	-	23.9	25.71	23.9	25.71	I	P	
B	Between internal live circuit and accessible part (near Q2 beside screw)	RI	1000	-	-	23.9	26.87	23.9	26.87	I	P	
C	Between internal live circuit and accessible part (near fuse beside screw)	RI	1000	-	-	23.9	29.51	23.9	29.51	I	P	
D	Between internal live circuit and accessible part (near battery beside screw)	RI	1000	-	-	23.9	25.00	23.9	25.00	I	P	
E	Between internal live circuit and accessible part (near button)	RI	1000	-	-	23.9	28.67	23.9	28.67	-	P	On PCB

6.7		TABLE: Insulation requirements - CLEARANCES and CREEPAGES				Form A.15				P		
6.2.2		Examination				6.5.4		Protective impedance		—		
6.4.2		ENCLOSURES and protective barriers				6.5.6		Current- or voltage-limiting device		—		
6.4.4		Impedance				9.6.1		BASIC INSULATION between opposite polarity		—		
Area	Location (See Form A.14)	Insulation type (NOTE 1)	WORKING VOLTAGE (NOTE 2)			CLEARANCE		CREEPAGE DISTANCE		CTI	Verdict	Comments
			RMS [V]	Peak [V]	Frequency [kHz]	Required [mm]	Measured [mm]	Required [mm]	Measured [mm]			
F	Between internal live circuit and accessible part (near rotary knob)	RI	1000	-	-	23.9	26.21	23.9	26.21	I	P	
G	Between V and COM (On PCB)	BI	1000Vrms			14.0	14.89	14.0	14.89	I	P	
NOTE 1 – refer to Form A.14 for type of insulation shown in the insulation diagram						NOTE 2 - to be used for definition of required insulation (see Form A.14)						
Input supply voltage.....:		1000	V	-	Hz							
Supplementary information:												

6.8	TABLE: Dielectric strength tests				Form A.18	P
4.4.4.1 b)	Conformity after application of SINGLE FAULT CONDITIONS ¹					P
6.4	Primary means of protection ²					P
6.6	Connections to external circuits					P
6.7	Insulation requirements ² (see Annex K)					P
6.10.2	Fitting of non-detachable MAINS supply cords ¹					N/A
9.2 a) 2)	Eliminating or reducing the sources of ignition within the equipment					N/A
9.4 c)	Limited-energy circuit					N/A
9.6.1	Overcurrent protection basic insulation between MAINS - parts					N/A
	Test site altitude				0m	—
	Test voltage correction factor (see table 10)				1.22	—
Location or references from Forms A.1 and A.14	Clause or sub-clause	Humidity	Working voltage	Test voltage	Comments (NOTE)	Verdict
		Yes/No	[r.m.s./d.c.]	[r.m.s./peak/d.c.]		
Interior circuit to accessible parts	6.4, 6.5.3	Yes	1000Vac	12688Vrms	1min	P
	6.6.1, 8	No	1000Vac	12688Vrms	1min	P
	4.4.4.1 b)	No	1000Vac	12688Vrms	1min	P
"V" terminal to "COM" terminal	6.4, 6.5.3	Yes	1000Vac	8044Vrms	1min	P
	6.6.1, 8	No	1000Vac	8044Vrms	1min	P
	4.4.4.1 b)	No	1000Vac	8044Vrms	1min	P
¹ Record the fault, test or treatment applied before the dielectric strength test. ² Humidity preconditioning required. NOTE: Test duration may be recorded.						
Supplementary information:						

10.	TABLE: Temperature Measurements			Form A.26A	P
10.1	Surface temperature limits – NORMAL CONDITION and / or SINGLE FAULT CONDITION				P
10.2	Temperature of windings – NORMAL CONDITION and / or SINGLE FAULT CONDITION				N/A
10.3	Other temperature measurements				P
Operating conditions:		Normal 10A measuring (30s on each 15min)			
Frequency..... :	- Hz	Test room ambient temperature (ta)...	20.4 °C		
Voltage..... :	4.5 V	Test duration..... :	1 h 57 min		
Part / Location	t_m [°C]	t_c [°C]	t_{max} [°C]	Verdict	Comments
PCB near A fuse	26.7	61.3	130	P	
Battery cover near A fuse	24.0	58.6	85	P	
LCD surface	25.3	59.9	85	P	
Button	24.8	59.4	85	P	
Roary switch	24.0	58.6	85	P	
Enclosure near A terminal	25.5	60.1	85	P	
<p>NOTE 1 - t_m = measured temperature t_c = t_m corrected ($t_m - t_a + 40$ °C or max. RATED ambient) t_{max} = maximum permitted temperature</p> <p>NOTE 2 - see also 14.1 with reference to component operating conditions</p> <p>NOTE 3 - Record values for NORMAL CONDITION and / or SINGLE FAULT CONDITION in this Form use additional form if necessary</p> <p>NOTE 4 - see Form A.26B for details of winding temperature measurements</p>					
Supplementary information:					
Corrected to 55°C.					

10.	TABLE: Temperature Measurements			Form A.26A	P
10.1	Surface temperature limits – NORMAL CONDITION and / or SINGLE FAULT CONDITION				P
10.2	Temperature of windings – NORMAL CONDITION and / or SINGLE FAULT CONDITION				N/A
10.3	Other temperature measurements				P
Operating conditions:		10A continual			
Frequency..... :	- Hz	Test room ambient temperature (ta)...	24.4 °C		
Voltage..... :	4.5 V	Test duration..... :	2 h 23 min		
Part / Location	t_m [°C]	t_c [°C]	t_{max} [°C]	Verdict	Comments
PCB near A fuse	48.1	78.7	130	P	
Battery cover near A fuse	29.5	60.1	120	P	
LCD surface	28.8	59.4	120	P	
Button	26.4	57.0	120	P	
Roary switch	25.7	56.3	120	P	
Enclosure near A terminal	46.5	77.1	120	P	
NOTE 1 - t_m = measured temperature t_c = t_m corrected ($t_m - t_a + 40$ °C or max. RATED ambient) t_{max} = maximum permitted temperature NOTE 2 - see also 14.1 with reference to component operating conditions NOTE 3 - Record values for NORMAL CONDITION and / or SINGLE FAULT CONDITION in this Form use additional form if necessary NOTE 4 - see Form A.26B for details of winding temperature measurements					
Supplementary information:					
Corrected to 55°C.					

10.	TABLE: Temperature Measurements			Form A.26A	P
10.1	Surface temperature limits – NORMAL CONDITION and / or SINGLE FAULT CONDITION			P	
10.2	Temperature of windings – NORMAL CONDITION and / or SINGLE FAULT CONDITION			N/A	
10.3	Other temperature measurements			P	
Operating conditions:	S-C battery				
Frequency..... :	- Hz	Test room ambient temperature (ta)...		22.2 °C	
Voltage..... :	4.5 V	Test duration..... :		1 h 7 min	
Part / Location	t_m [°C]	t_c [°C]	t_{max} [°C]	Verdict	Comments
PCB near A fuse	27.4	60.2	130	P	
Battery cover near A fuse	70.8	103.6	120	P	
LCD surface	40.0	72.8	120	P	
Button	40.0	72.8	120	P	
Roary switch	26.3	59.1	120	P	
Enclosure near A terminal	27.8	60.6	120	P	
<p>NOTE 1 - t_m = measured temperature t_c = t_m corrected ($t_m - t_a + 40$ °C or max. RATED ambient) t_{max} = maximum permitted temperature</p> <p>NOTE 2 - see also 14.1 with reference to component operating conditions</p> <p>NOTE 3 - Record values for NORMAL CONDITION and / or SINGLE FAULT CONDITION in this Form use additional form if necessary</p> <p>NOTE 4 - see Form A.26B for details of winding temperature measurements</p>					
Supplementary information:					
Corrected to 55°C.					

TABLE 1.A: List of components and circuits relied on for safety						P
Unique component reference or location	Application/function	Manufacturer / trademark (NOTE 1)	Type / model	Technical data (NOTE 2)	Standard	Mark(s) of conformity evidence of acceptance (NOTE 3 and 4)
PCB	-	SHENZHEN HUA YAN HUI HAI ELECTRONIC CO LTD	HD	V-0, 130°C	UL 94	UL E237212
Alternative	-	Interchangeable	Interchangeable	V-0, 130°C	UL 94	UL
Fuse 1	-	EUGARD CO.,LTD	632.000.0.6	FF600mA, 1000V, Φ6X32mm, Interrupting Rating 10KA	UL 248-14	UL E365879
Alternative	-	DONGGUAN BETTER ELECTRONICS TECHNOLOGY CO LTD	693 Series	FF600mA, 1000V, Φ6X32mm, Interrupting Rating 10KA	UL 248-14	UL E300003
Fuse 2	-	ADLER Elektrotechnik Leipzig GmbH	APD Series	FF11A, 1000V, Φ10X38mm, Interrupting Rating 30KA	UL 248-14	UL E485737
Alternative	-	HOLLYLAND CO LTD	HC10aR	FF11A, 1000V, Φ10X38mm, Interrupting Rating 30KA	UL 248-14	UL E156471
PTC	PTC1, 2,3,4	ShenZhen Ampron Sensitive Components Co.	MZ11-07M112M550	1.1KΩ±20%, Work Voltage 550V, Withstand 1000V	EN 60738-1	TUV R50187698
Alternative	-	SHENZHEN WEILIN HI-TECH CO LTD	WMZ12A-102X	1.1KΩ±20%, Withstand 1000V	UL 1434	UL E232204
Varistor	RV1,2,3	CENTRA SCIENCE CORP	CNR-07V821K	Varistor Voltage 738~902, Withstand surge Current 1750A	UL1449	UL E316325 VDE 127092
Alternative	-	BESTBRIGHT ELECTRONICS CO LTD	821KD07X	Varistor Voltage 675~825, Withstand surge Current 1750A	UL1449	UL E327997
Enclosure	-	SABIC INNOVATIVE PLASTICS B V	C2950	PC/ABS, 85°C, V-0, min thickness: 1.6mm, material group I	UL 94	UL E45329
Alternative	-	SHANGHAI CHANGWEI JINCI ENGINEERING PLASTICS CO LTD	PC/ABS5288F	PC/ABS, 60°C, V-0, min thickness: 1.6 mm, material group III	UL 94	UL E313427
Alternative	-	CHI MEI CORPORATION	PC-6600	PC, 130°C, min thickness: 1.6 mm, V-0, material group III	UL 94	UL E56070

TABLE 1.A: List of components and circuits relied on for safety						P
Unique component reference or location	Application/function	Manufacturer / trademark (NOTE 1)	Type / model	Technical data (NOTE 2)	Standard	Mark(s) of conformity evidence of acceptance (NOTE 3 and 4)
Transparent Cover	-	SABIC INNOVATIVE PLASTICS US L L C	940A	PC, V-2, 130°C, min thickness: 1.5mm, material Group III	UL 94	UL E121562
Alternative	-	Covestro Deutschland AG [PC Resins]	2405+(z)	PC, V-2, 125°C, min thickness: 1.5mm, material Group III	UL 94	UL E41613
NOTE → 1 List all different manufacturers of the above components → 4 asterisk indicates mark assuring agreed level of surveillance → 2 May include electrical, mechanical values → 3 List licence no or method of acceptance						

Appendix 1 – Product photos



Photo 1 - Front view



Photo 2 – Rear view



Photo 3 – Rear enclosure



Photo 4 - Internal view 1

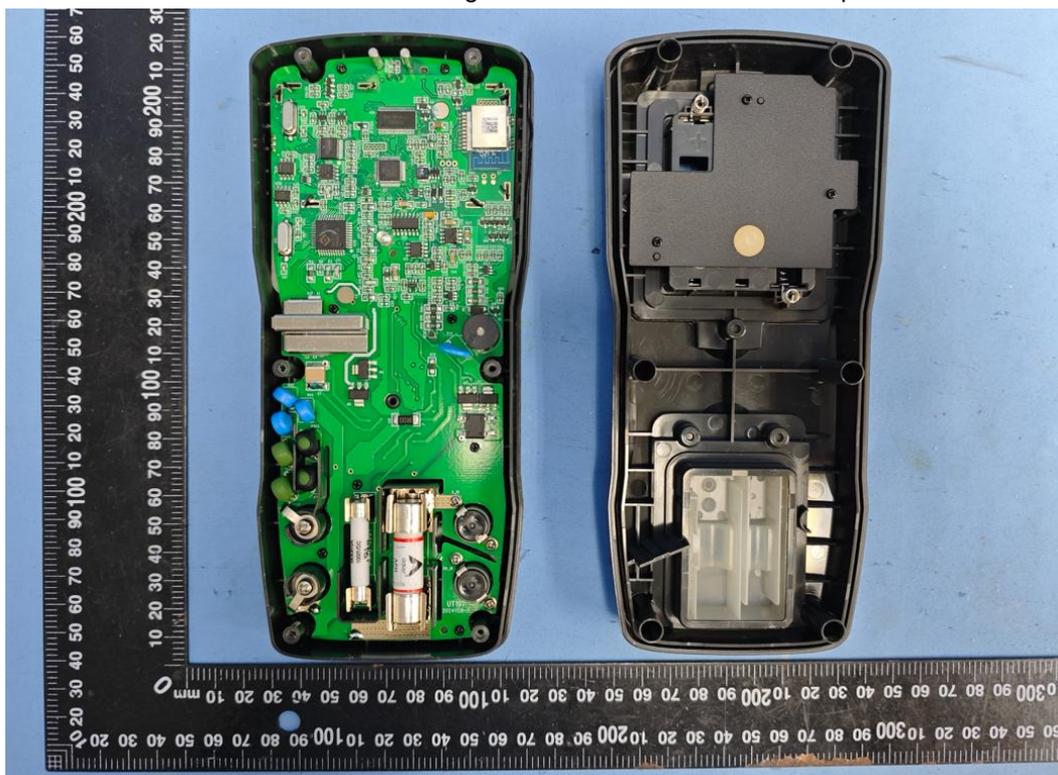


Photo 5 – Internal view 2



Photo 6 – Internal view 3

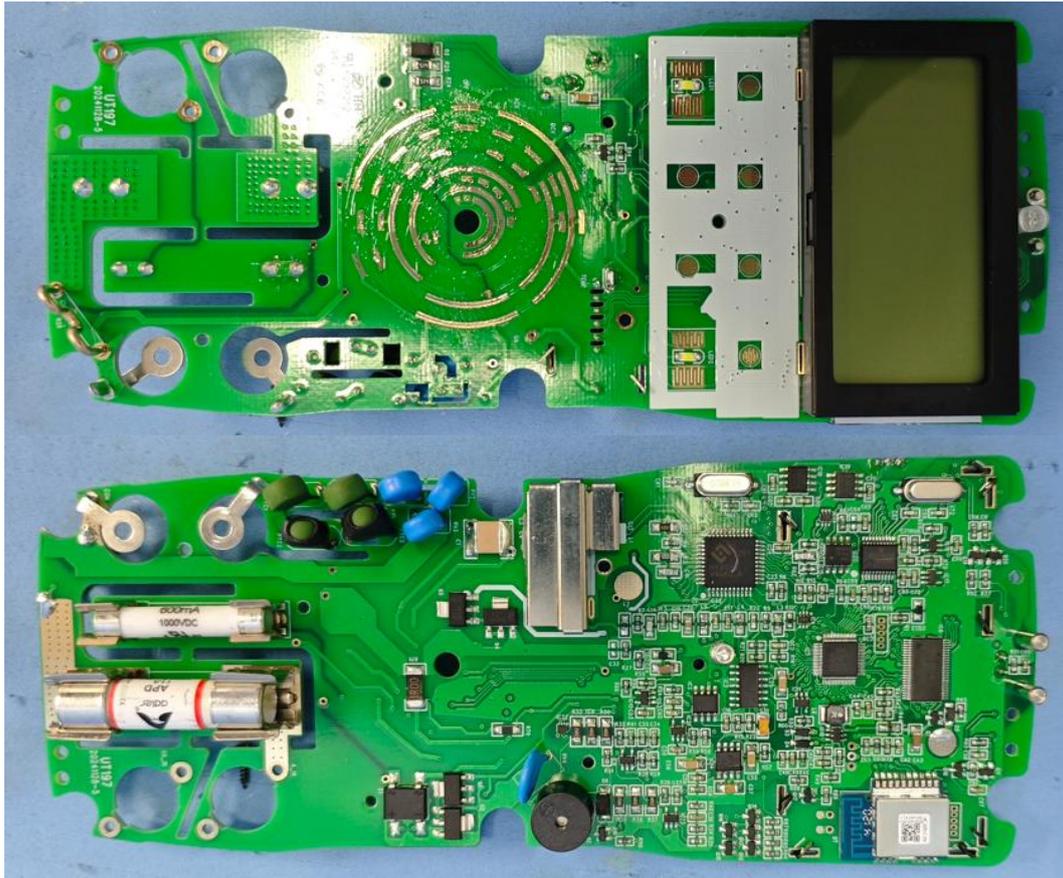


Photo 7 – PCB view

*****End of Report****